

(12) UK Patent Application (19) GB (11) 2 297 668 (13) A

(43) Date of A Publication 07.08.1996

(21) Application No 9519312.4

(22) Date of Filing 21.09.1995

(30) Priority Data

(31) 07015749 (32) 02.02.1995 (33) JP

(71) Applicant(s)

Fujitsu Limited

(Incorporated in Japan)

1015 Kamikodanaka, Nakahara-ku, Kawasaki-shi,
Kanagawa 211, Japan

(72) Inventor(s)

Shingo Mizuno

(74) Agent and/or Address for Service

Hasekine Lake & Co

Hazlitt House, 28 Southampton Buildings, Chancery
Lane, LONDON, WC2A 1AT, United Kingdom

(51) INT CL⁶

H04L 1/22 , H04B 1/74 10/08 , H04J 3/14

(52) UK CL (Edition O)

H4P PEE

H4B BK8

H4M MR

(56) Documents Cited

EP 0225643 A2

(58) Field of Search

UK CL (Edition N) H4B BKR BKX BK8 , H4M MP MR ,
H4P PEE PPD

INT CL⁶ H04B 1/74 10/08 , H04J 3/08 3/14 , H04L 1/22
12/437


Online: WPI,JAPIO

(54) Relieving radio transmission lines installed between optical transmission lines in a SDH network

(57) Radio working lines 14_{1W...} are provided to correspond to optical lines 13_{1W...} and a single radio standby line 14_p is provided. An optical-line failure detecting unit 22 monitors occurrence of failure in each of the optical lines, and a radio-line failure detecting unit 24 monitors the occurrence of failure in each of the radio working lines. When occurrence of failure in an optical line 13_{1W...} has been detected, a relief-rank management unit 25 reduces the relief priority level of the radio working line corresponding to this optical line below the priority levels of radio working lines corresponding to optical lines that have not failed. When a failure has occurred in two or more radio working lines, a line changeover controller 26 transmits data, which is to be sent to a radio working line that failed, via the radio standby line 14_p.

Alternatively, or additionally, priority levels are varied in accordance with line condition (unit 21) and/or redundancy configuration.

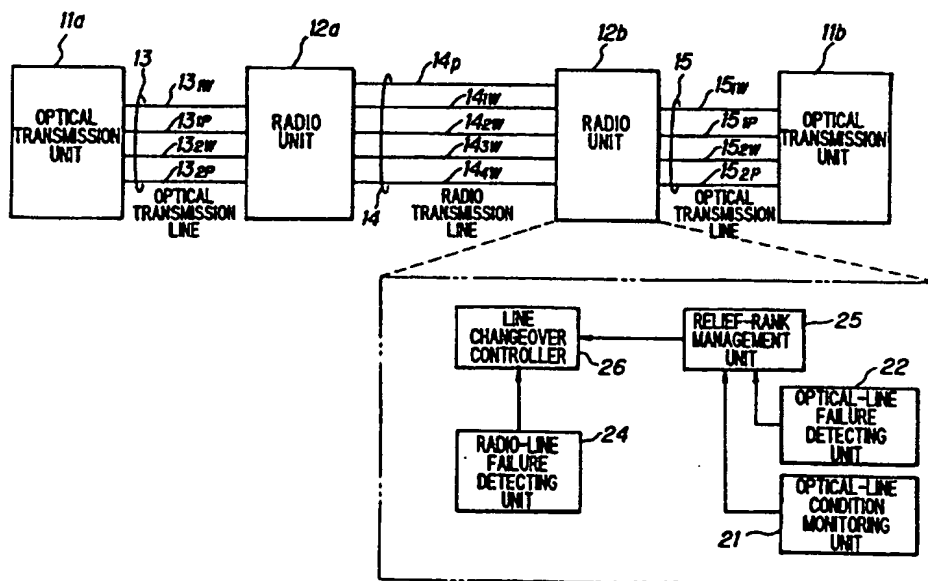FIG. 1



GB 2 297 668 A

FIG. 1

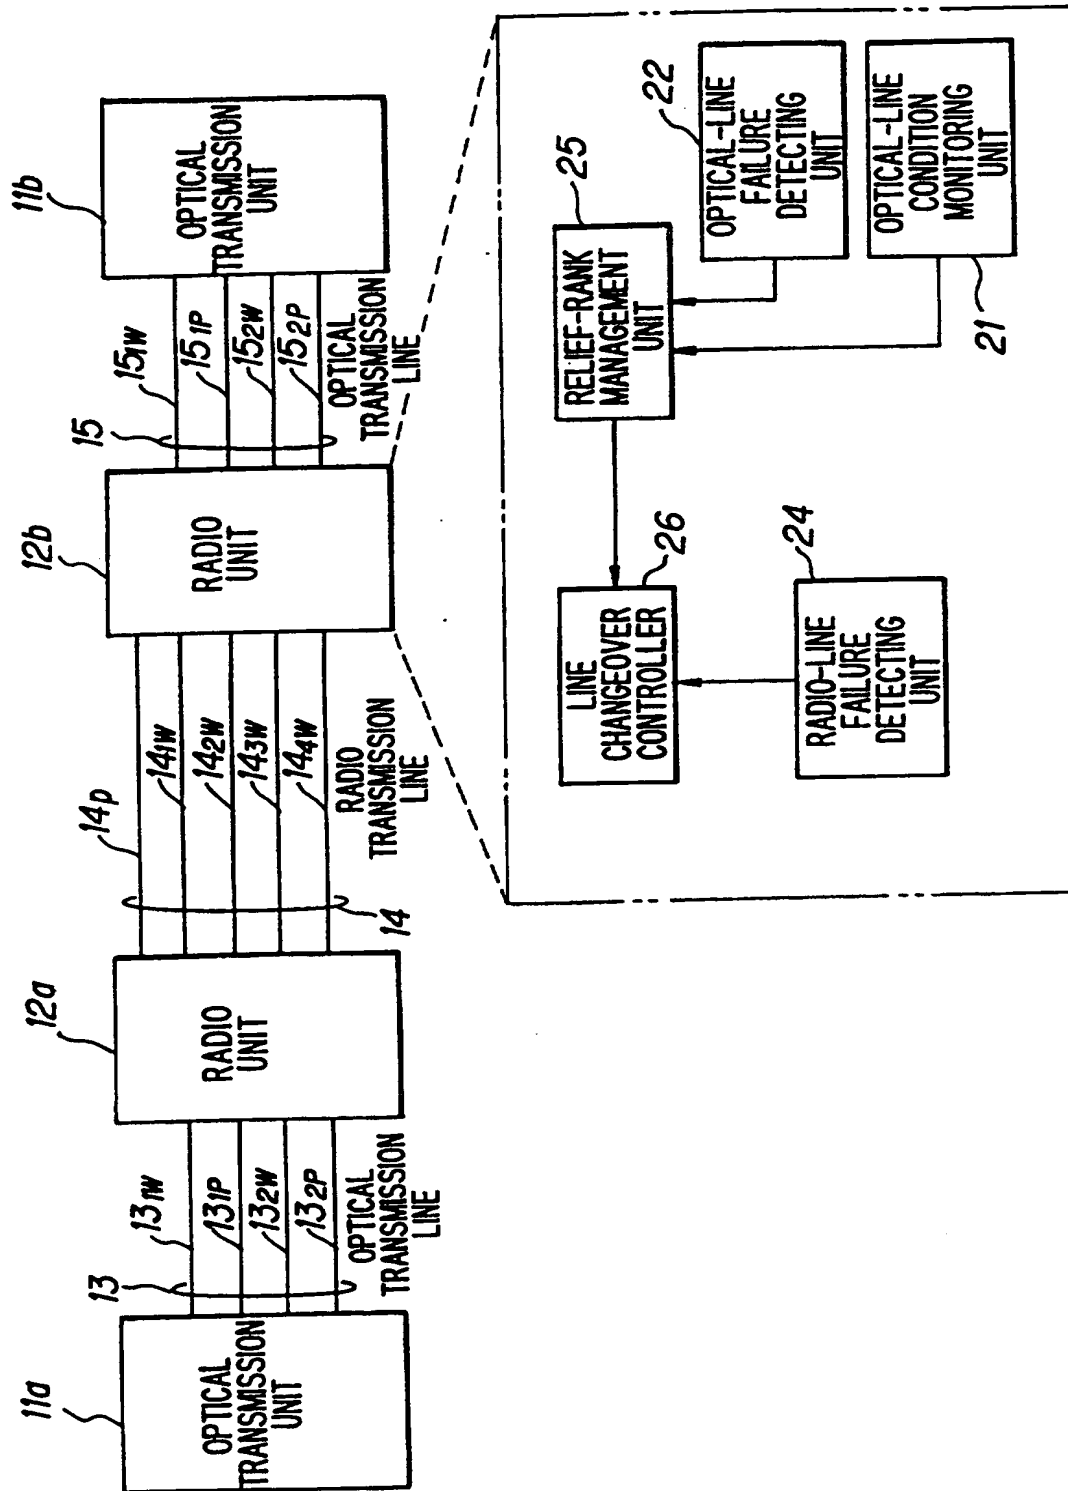


FIG. 2

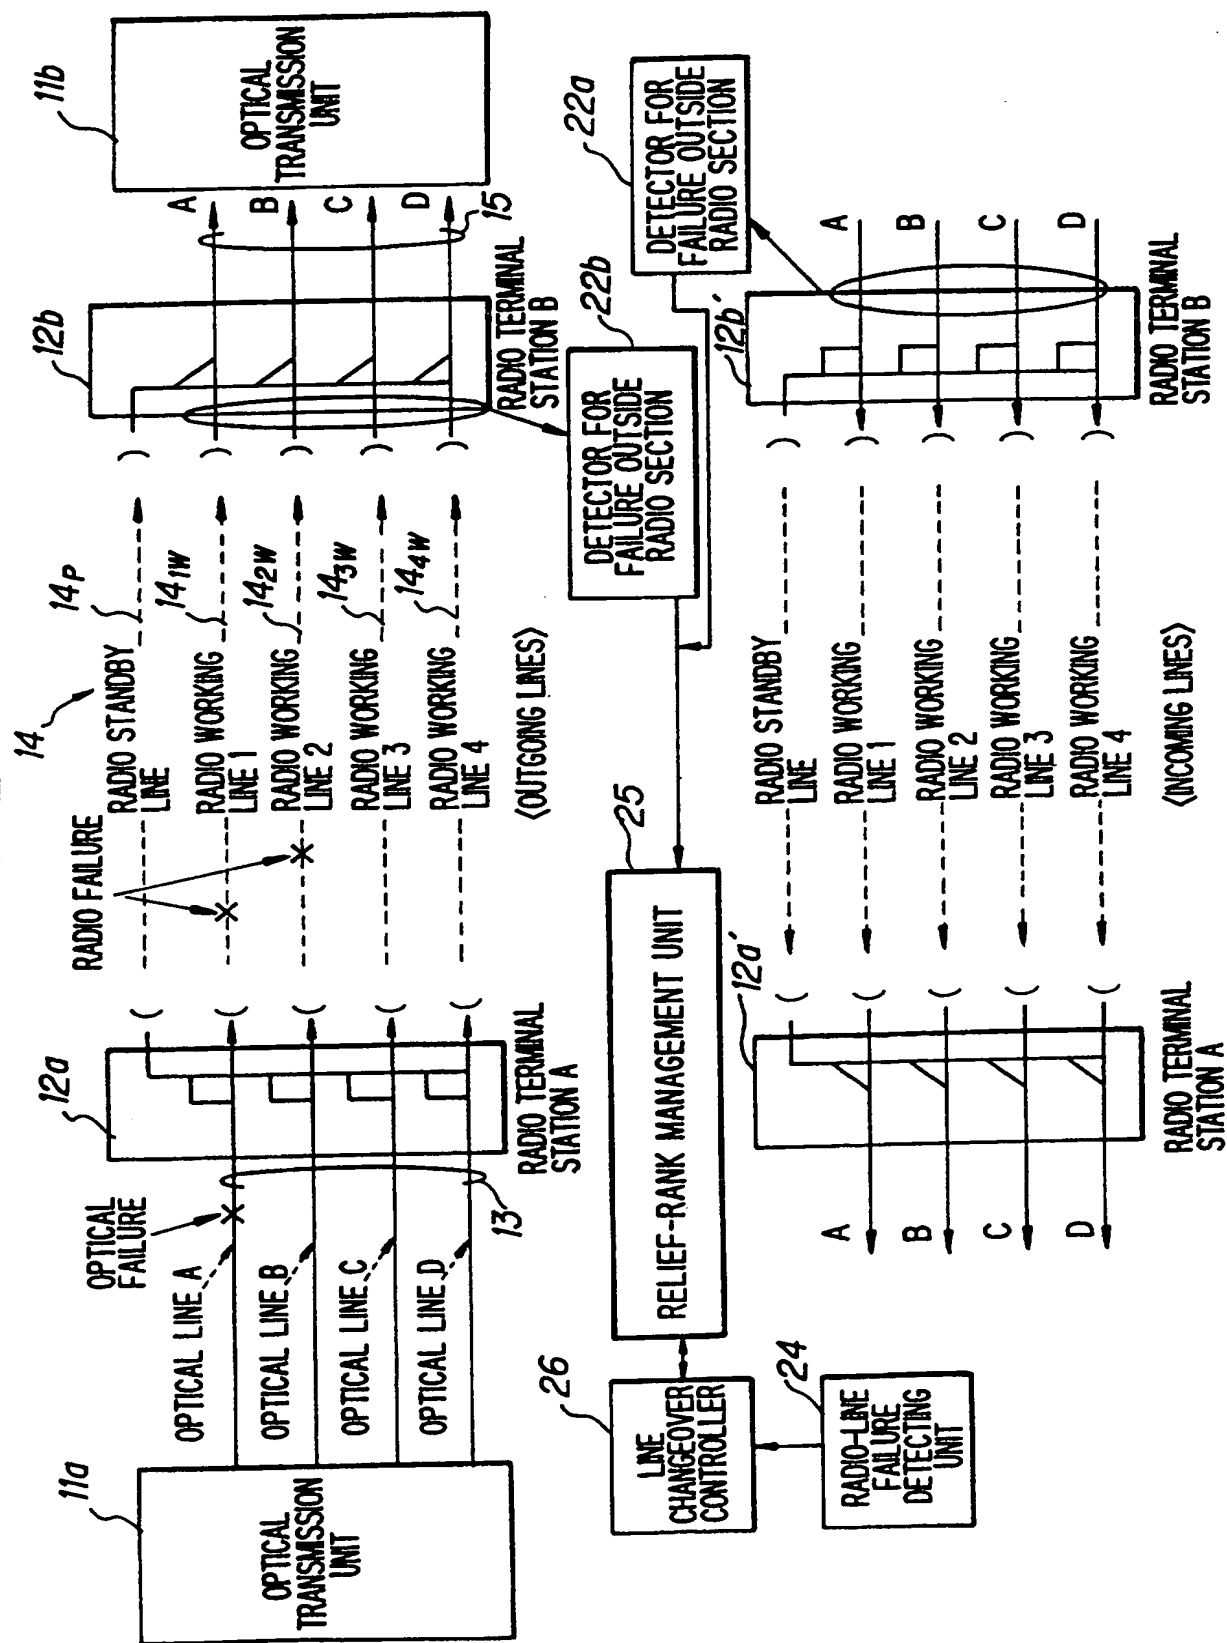


FIG. 3

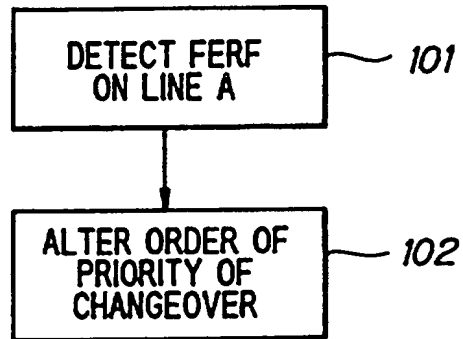


FIG. 4

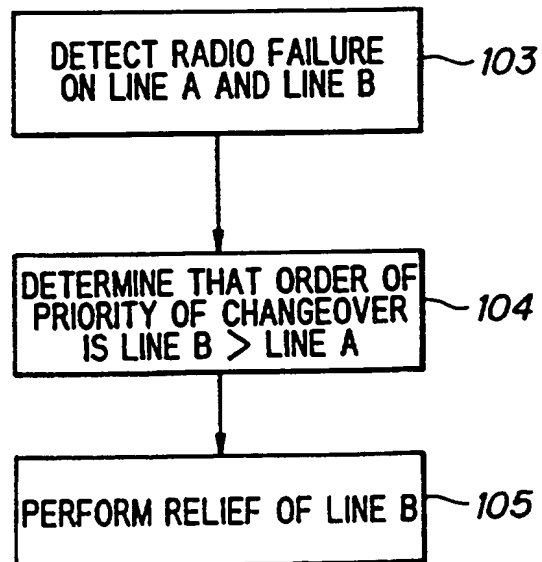


FIG. 5

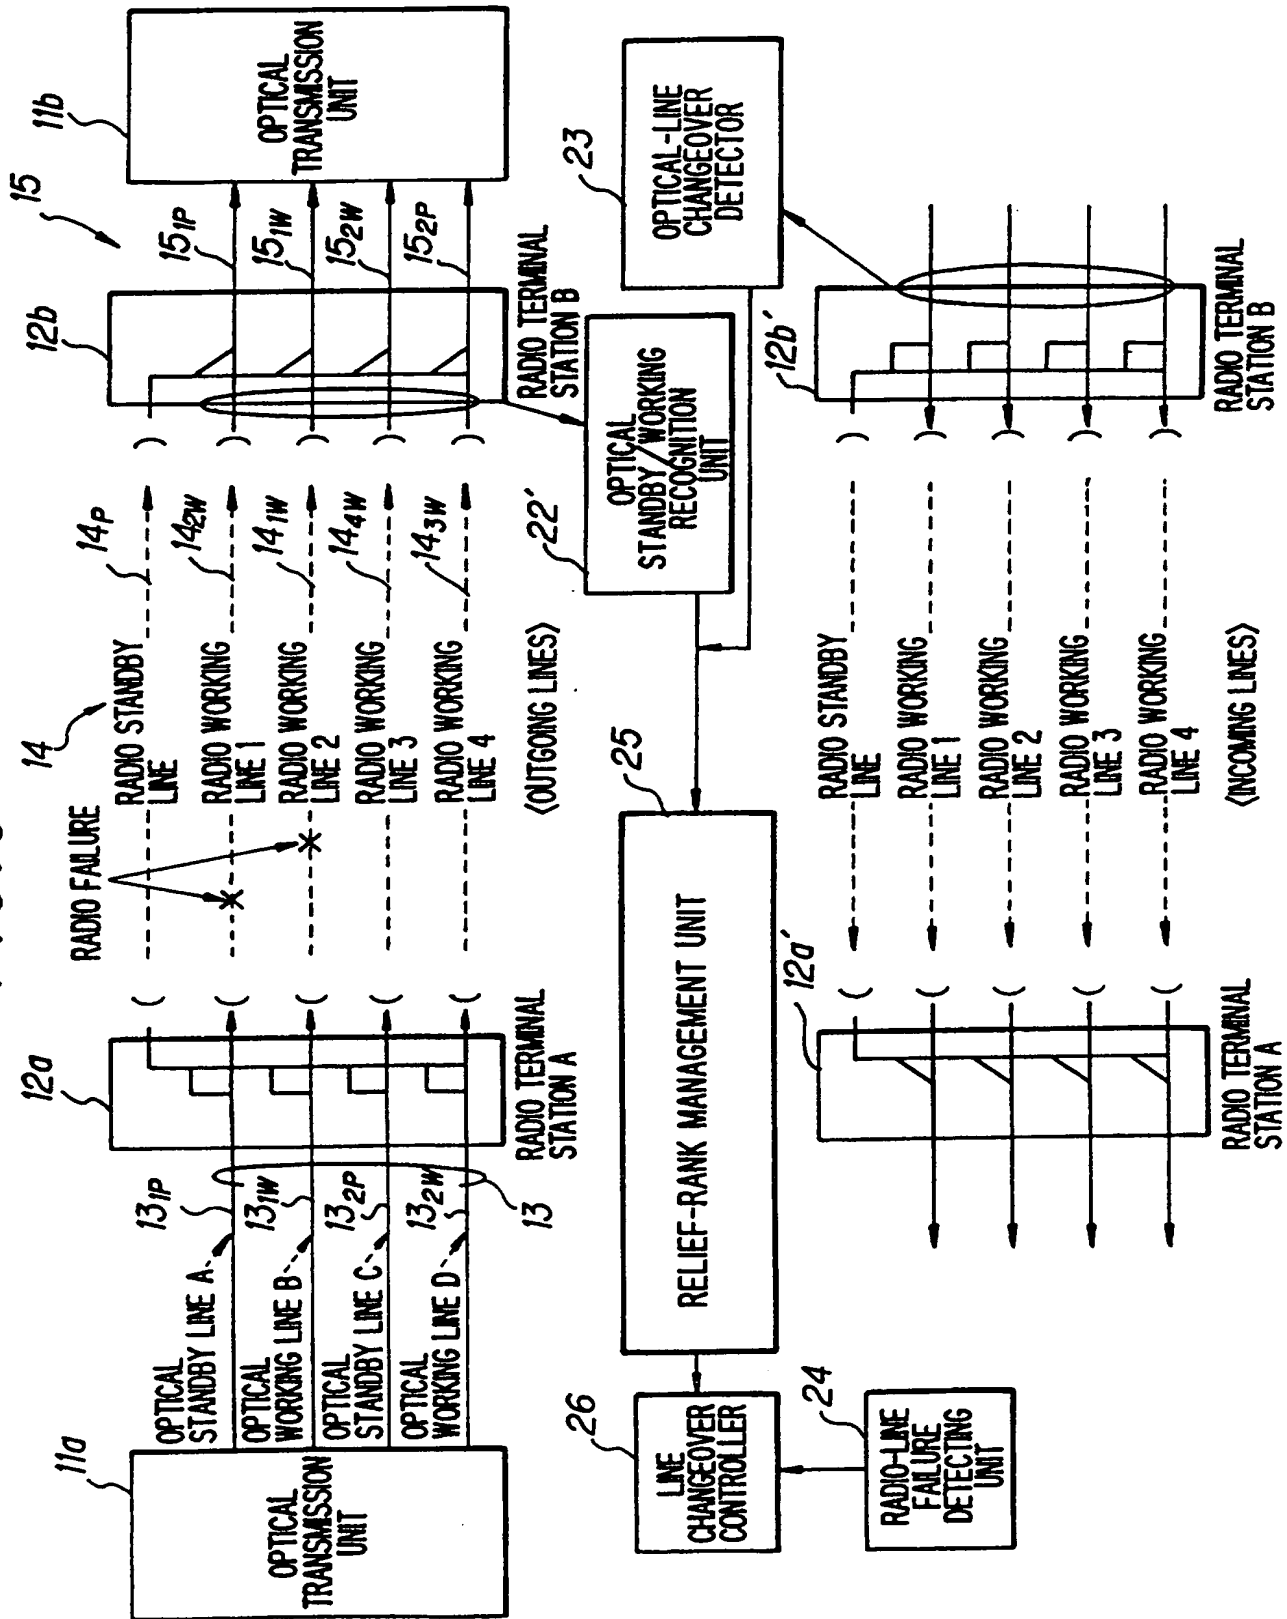
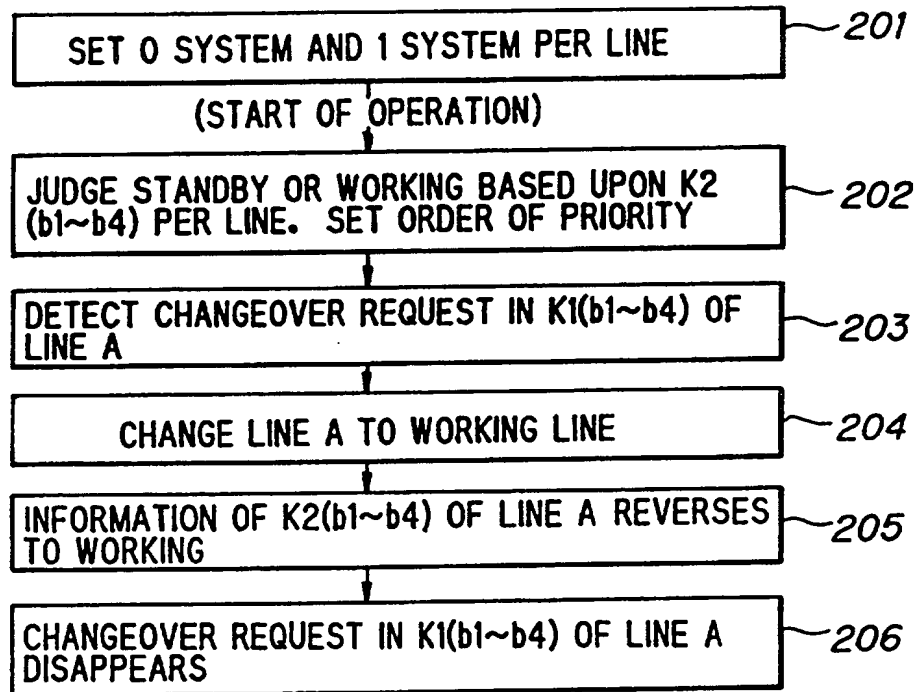
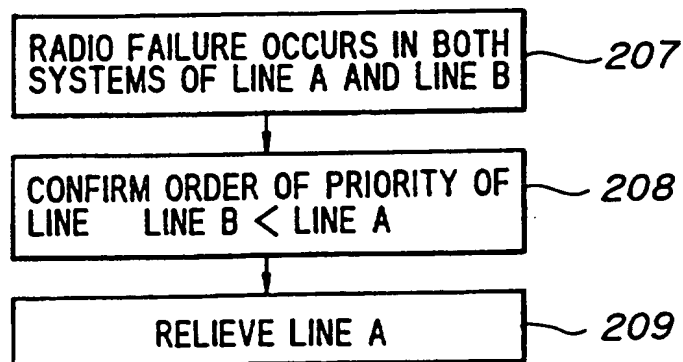


FIG. 6**FIG. 7**

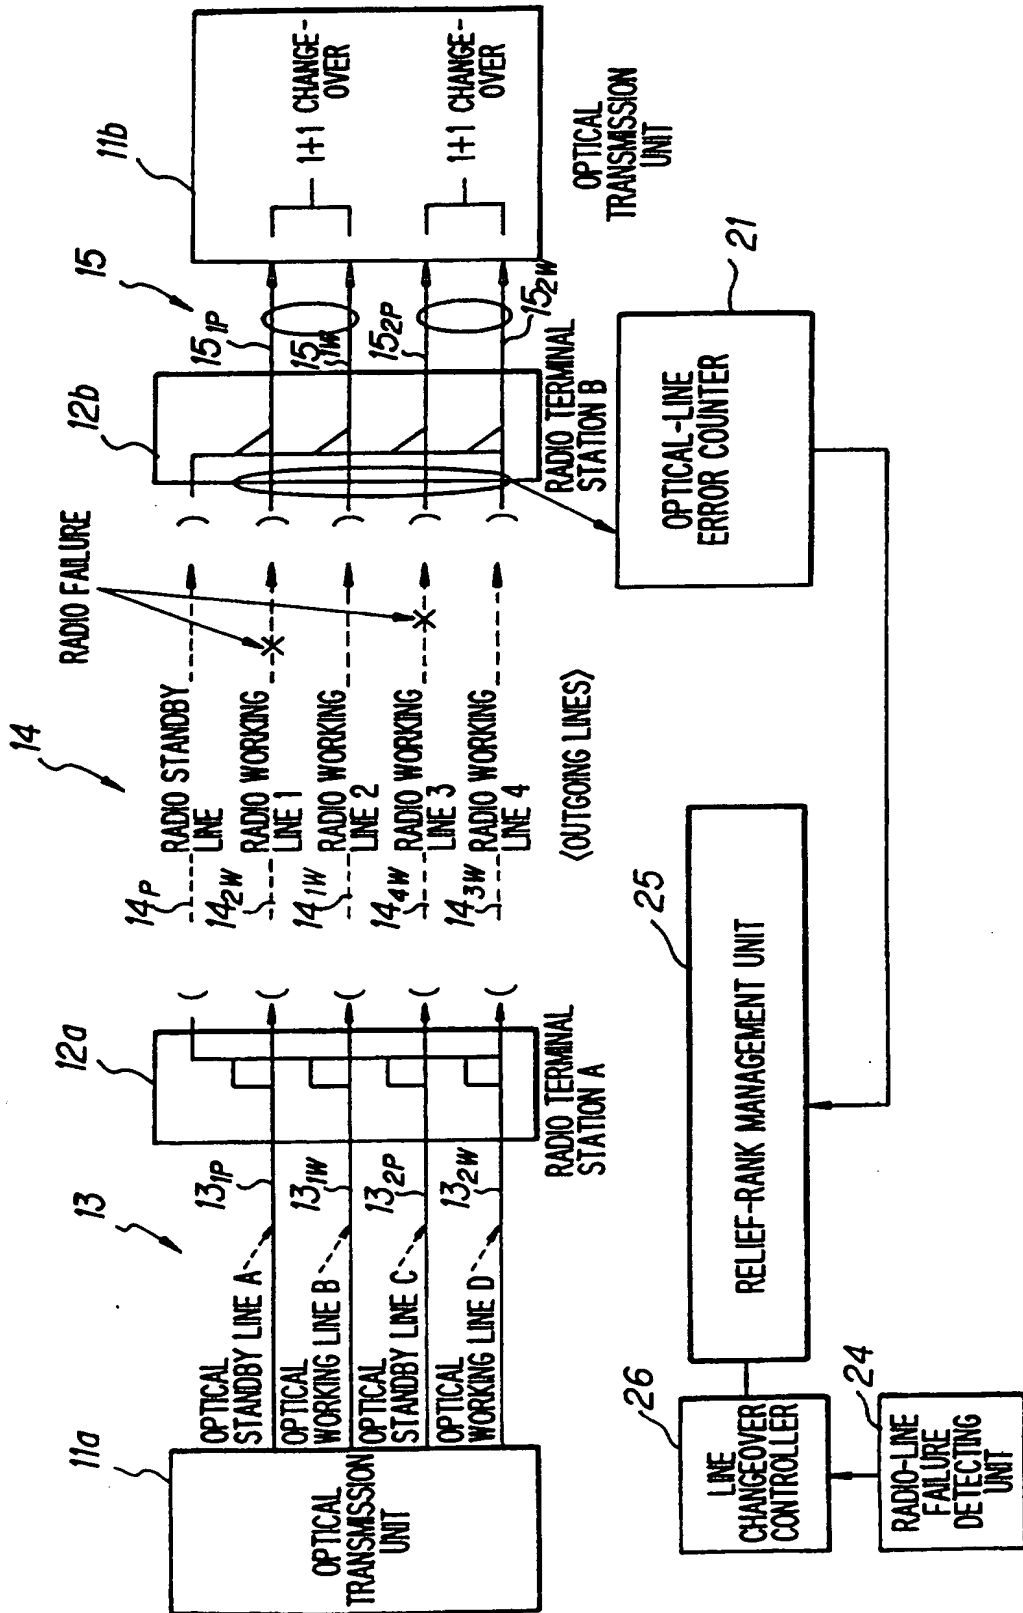


FIG. 9

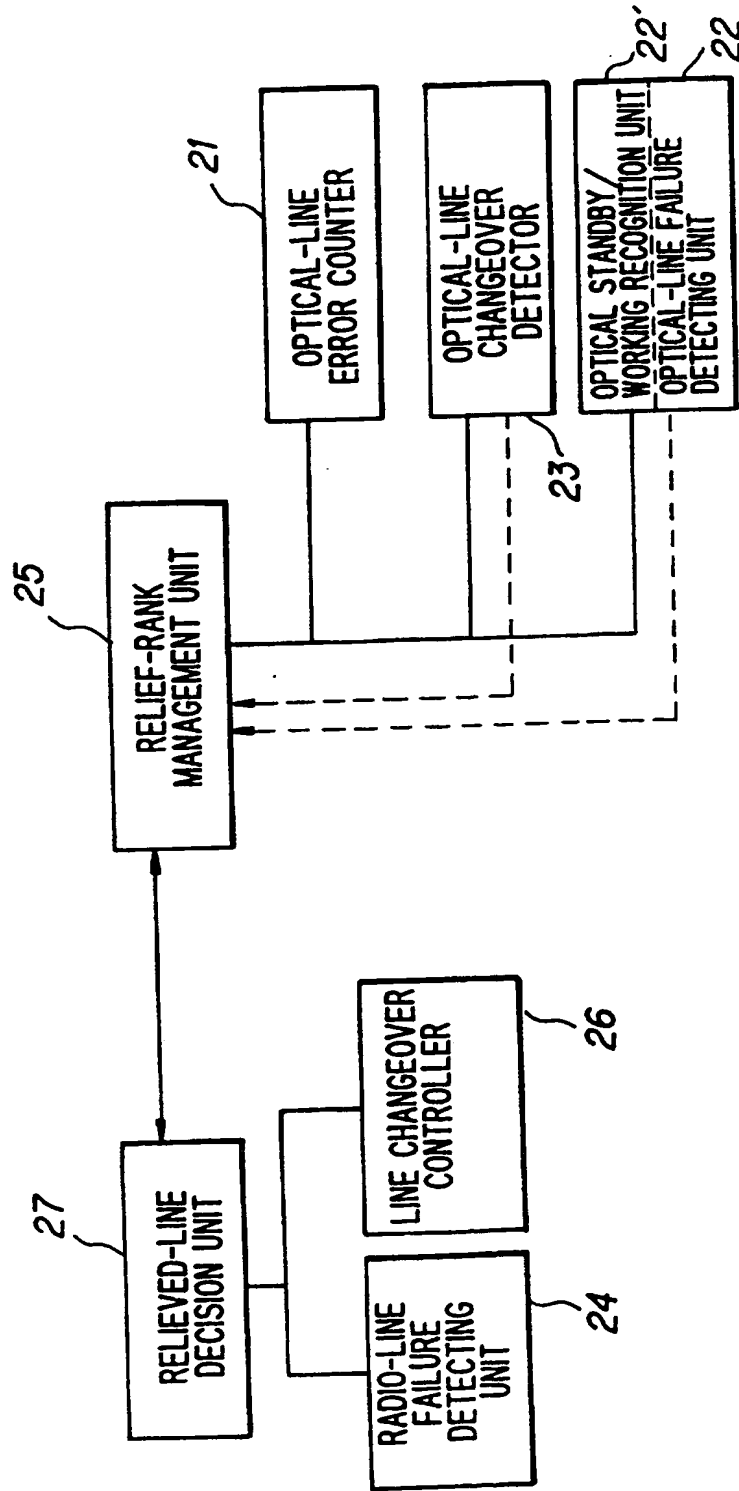


FIG. 10A

R/W	HARD SOFT INTERFACE			
R			ERROR COUNT OF LINE N	

R : READ , W : WRITE

FIG. 10B

R/W	HARD SOFT INTERFACE			
R	PAIR CODE OF OPTICAL STANDBY/WORKING		INCOMING SIDE	K1 BYTE (b1~b4) OF LINE N

SPECIFY PAIR BY PAIR CODE : 0000~1111

FIG. 10C

R/W	HARD SOFT INTERFACE			
R	0/1 SYSTEM CODE	NULL	INCOMING SIDE	K2 BYTE (b6~b8) OF LINE
R	K2 BYTE (b1~b4)	NULL	OUTGOING SIDE	K2 BYTE (b6~b8) OF LINE

0-SYSTEM CODE : 0000 1-SYSTEM CODE : 1111

FIG. 10D

R/W	HARD SOFT INTERFACE			
W	LINE NUMBER (N)		RELIEF ORDER OF PRIORITY	

LINE NUMBER : ARRAY 1, 2, 3, 4, . . . IN NUMERICAL ORDER
FROM HIGHER-ORDER ADDRESS

NUMBER OF ORDER OF PRIORITY : SET IN ORDER FROM HIGHEST-PRIORITY NUMBER
0001 TO LOWEST-PRIORITY NUMBER 1111

FIG. 11

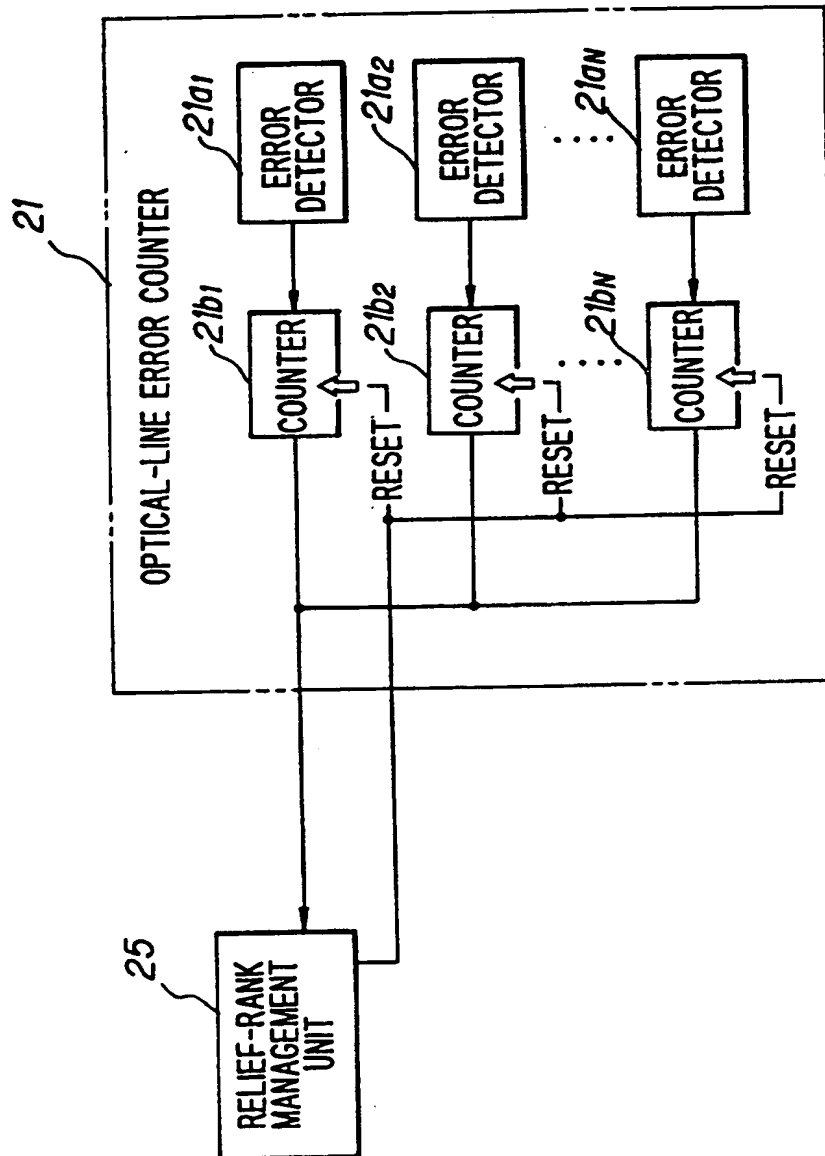


FIG. 12

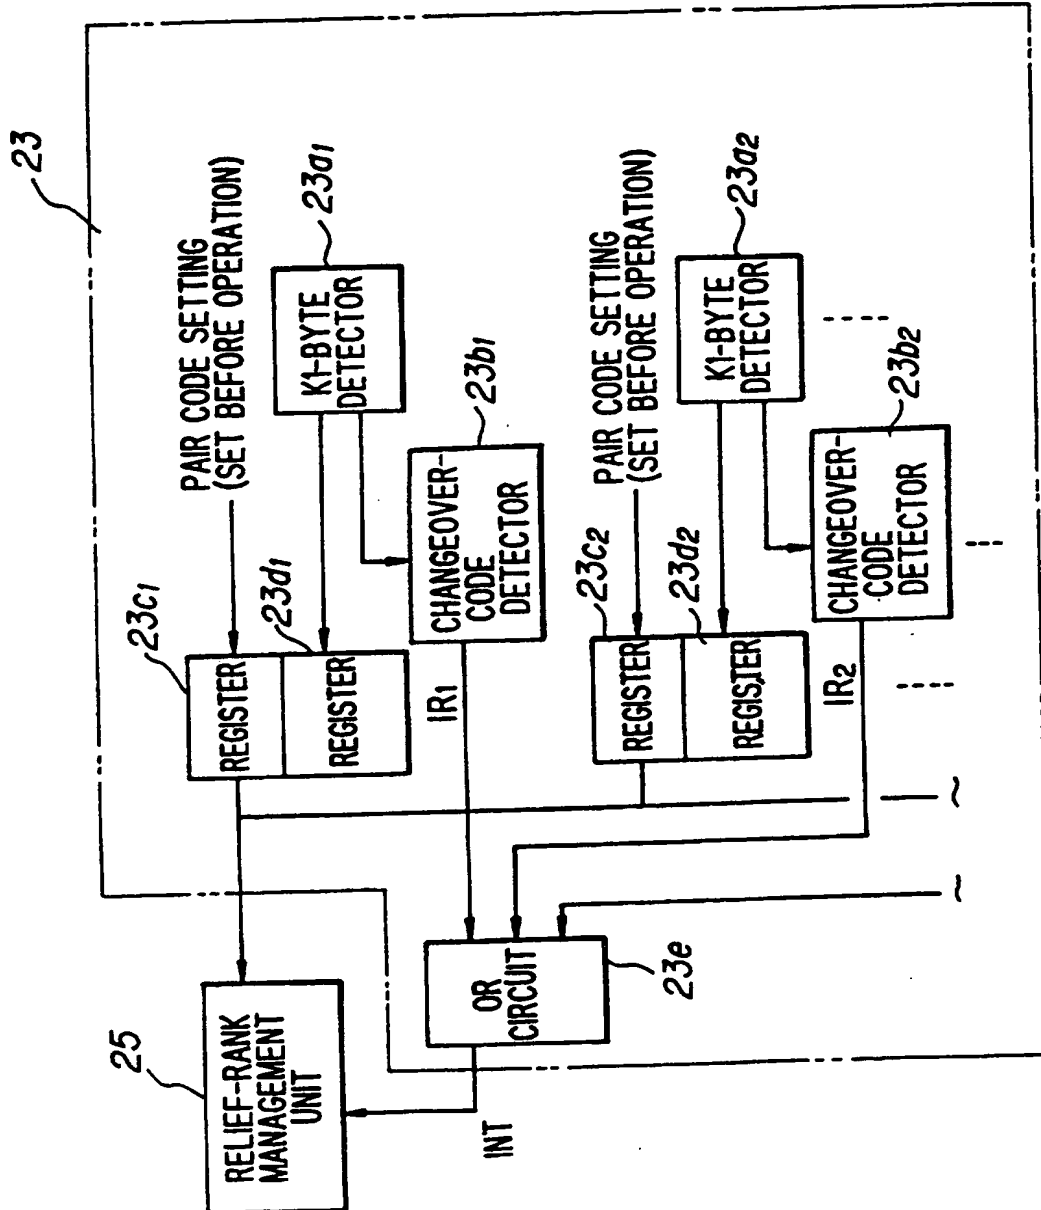


FIG. 14

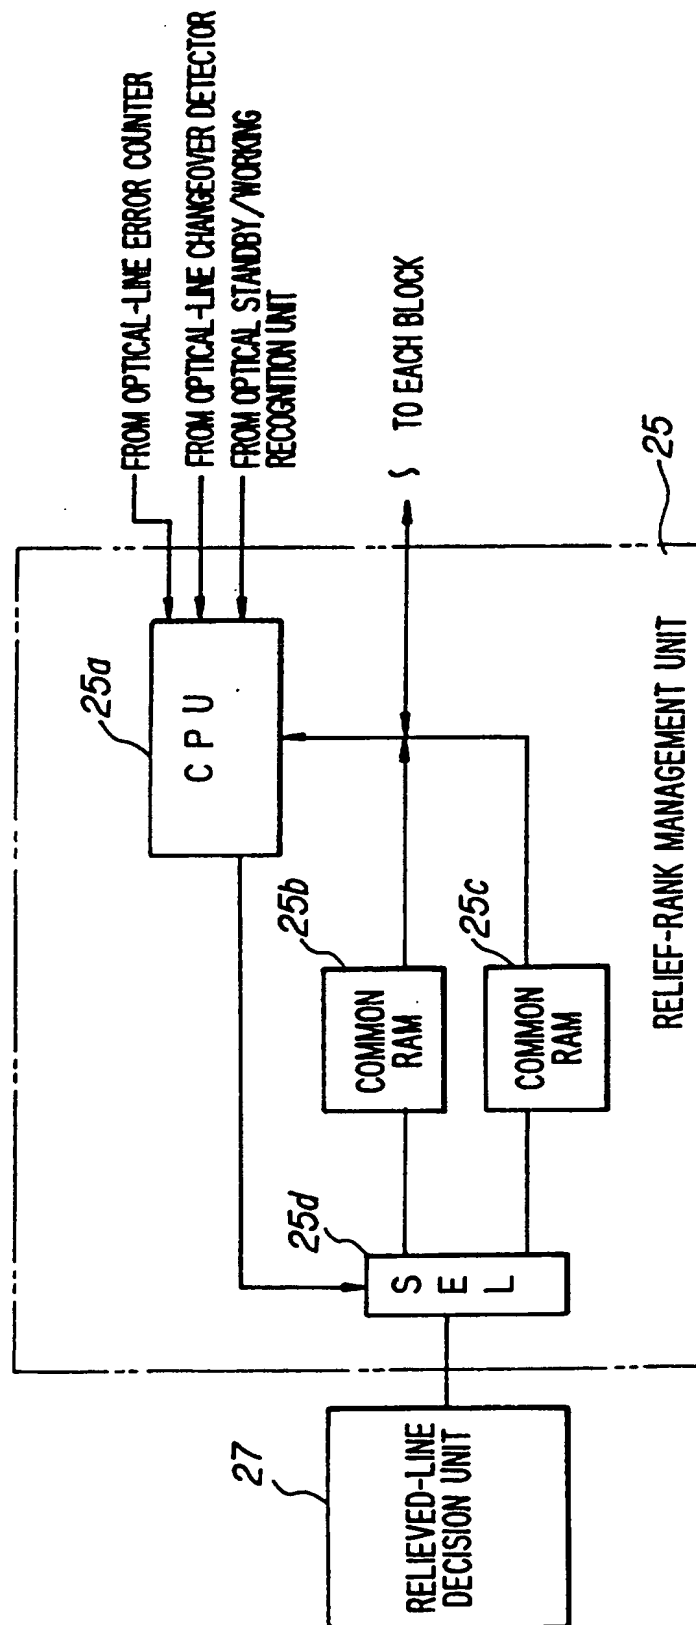


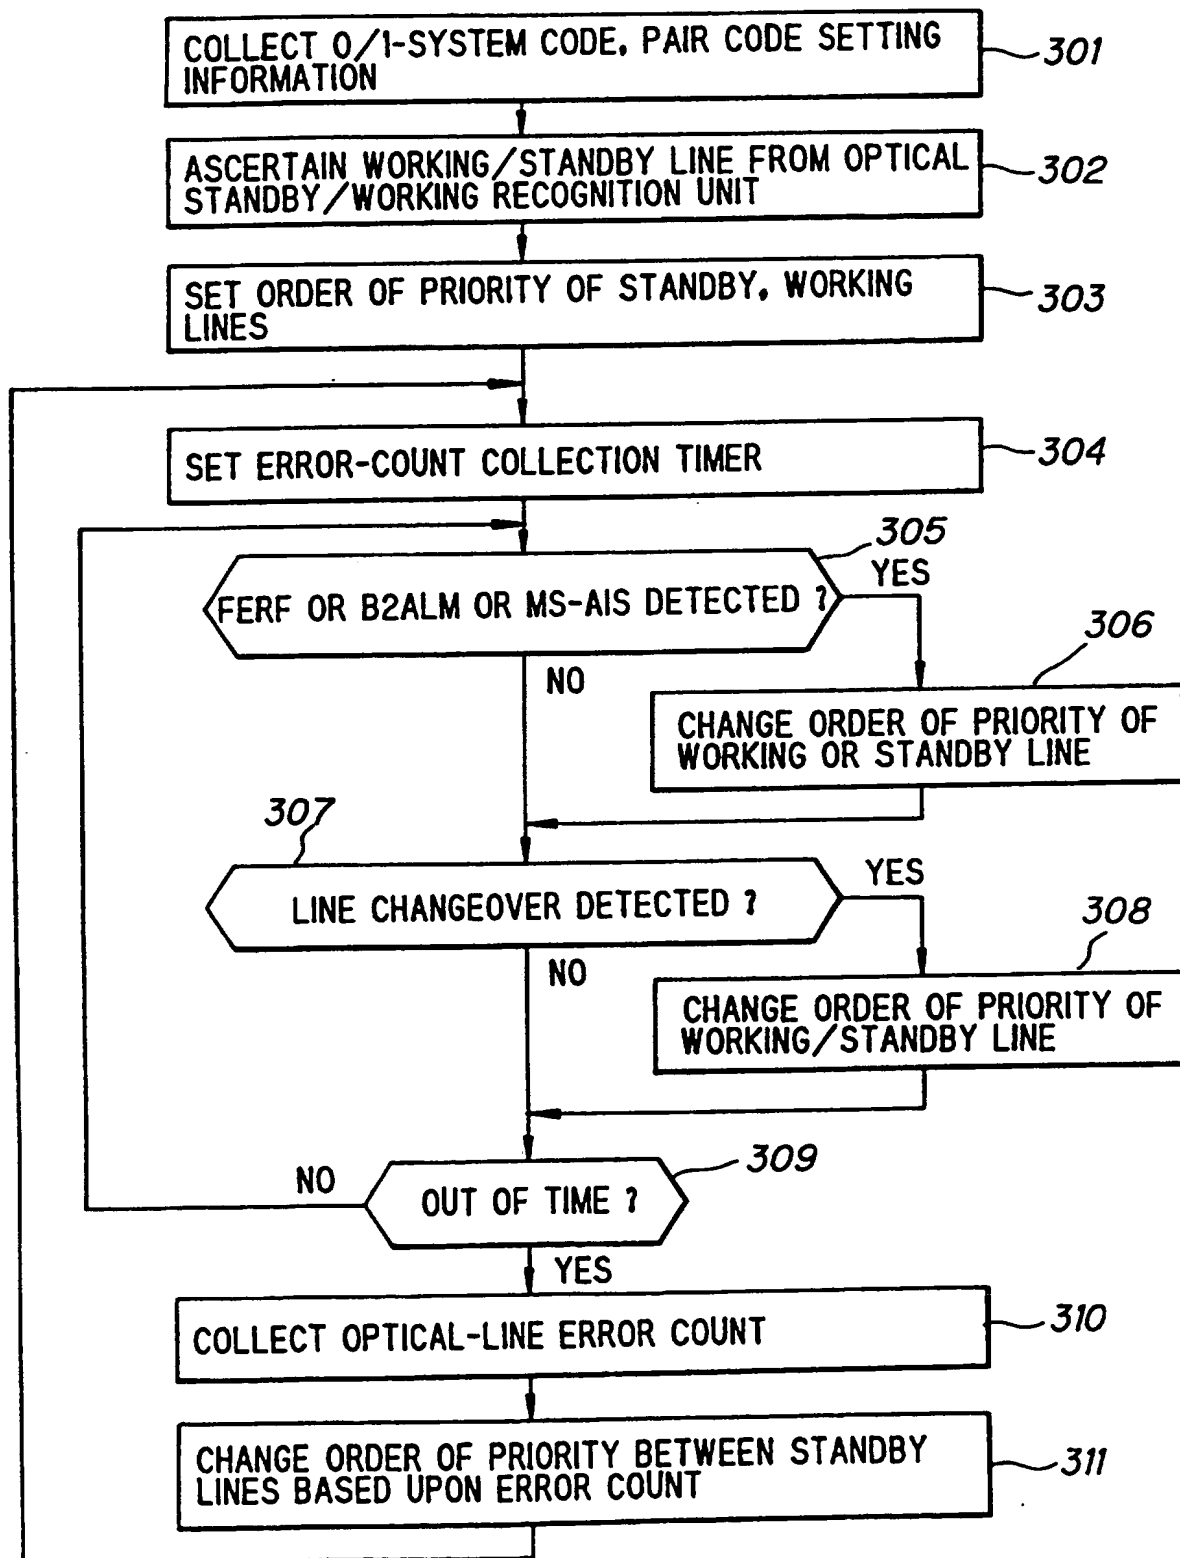
FIG. 15

FIG. 16A (PRIOR ART)

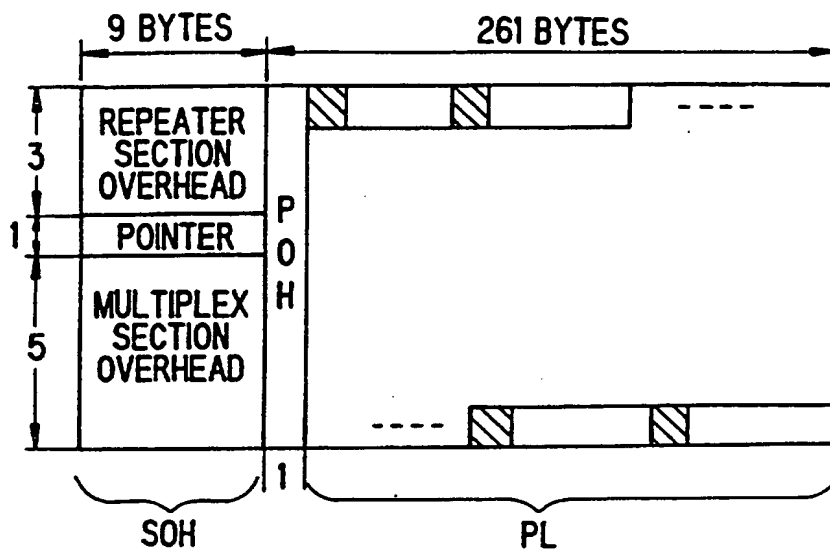


FIG. 16B (PRIOR ART)

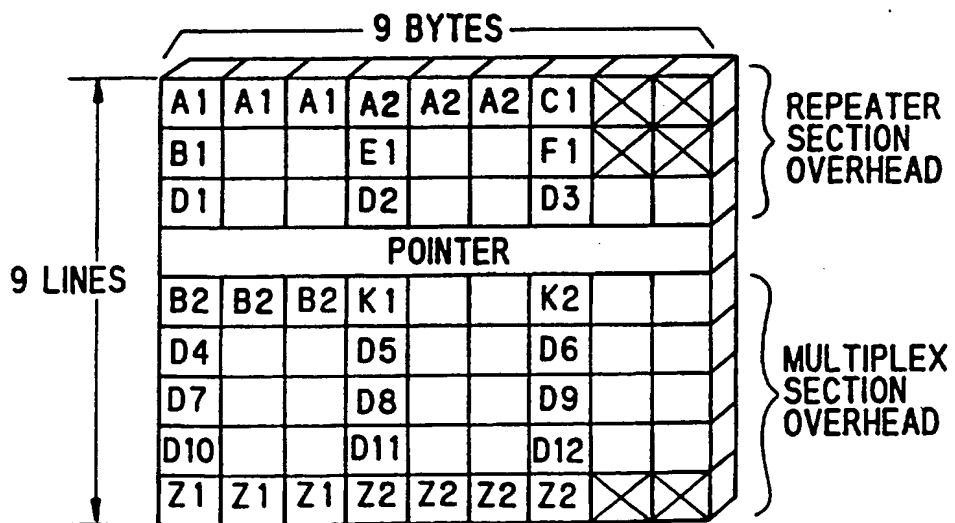


FIG. 17 (PRIOR ART)

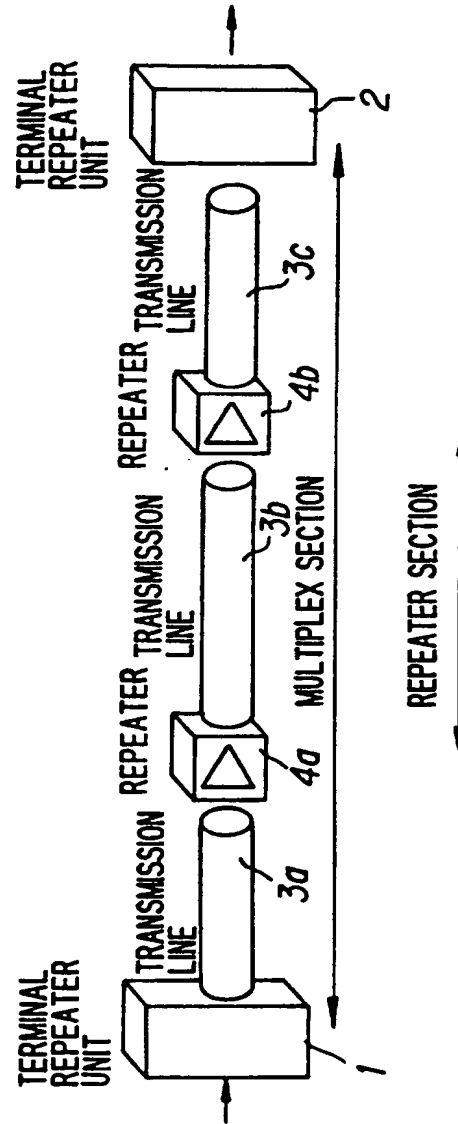


FIG. 18 (PRIOR ART)

SYMBOL	USE IN NNI	APPLICATION TO UNI	
A1, A2	FRAME SYNCHRONISM	○	
C1	IDENTIFICATION NUMBER OF EACH STM-1 IN STM-N	○	
B1	ERROR MONITORING IN REPEATER SECTION	△	BIP-8
E1	AUDIO ARRANGEMENTS IN REPEATER SECTION	—	
F1	MALFUNCTION SPECIFICATION IN REPEATER SECTION	—	
D1~D3	DATA COMMUNICATION IN REPEATER SECTION	—	
B2	SECTION ERROR MONITORING	○	BIP-24Xn (n=1 or 4)
K1	CONTROL OF CHANGEOVER SYSTEM	—	
K2	TRANSFER OF MULTIPLEX SECTION STATUS	○	TRANSFER OF AIS/FERF OF SECTION
D4~D12	DATA COMMUNICATION IN MULTIPLEX SECTION	—	
Z1	MULTIPLEX STANDBY	—	
Z2	NOTIFICATION OF MULTIPLEX ERROR STATUS	○	
B2	AUDIO ARRANGEMENTS IN MULTIPLEX SECTION	—	
REPEATER SECTION OVERHEAD			
MULTIPLEX SECTION OVERHEAD			

FIG. 19 (PRIOR ART)

BIT	K1								K2							
	b1	b2	b3	b4	b5	b6	b7	b8	b1	b2	b3	b4	b5	b6	b7	b8
SET CONTENT	TYPE OF CHANGEOVER REQUEST				NUMBER OF WORKING TRANSMISSION LINE THAT OUTPUTTED CHANGEOVER REQUEST				NUMBER OF WORKING LINE 0010:1-SYSTEM 0001:0-SYSTEM				STATUS OF TRANSMISSION LINE			

CHANGE-
OVER
CONFIGURATION

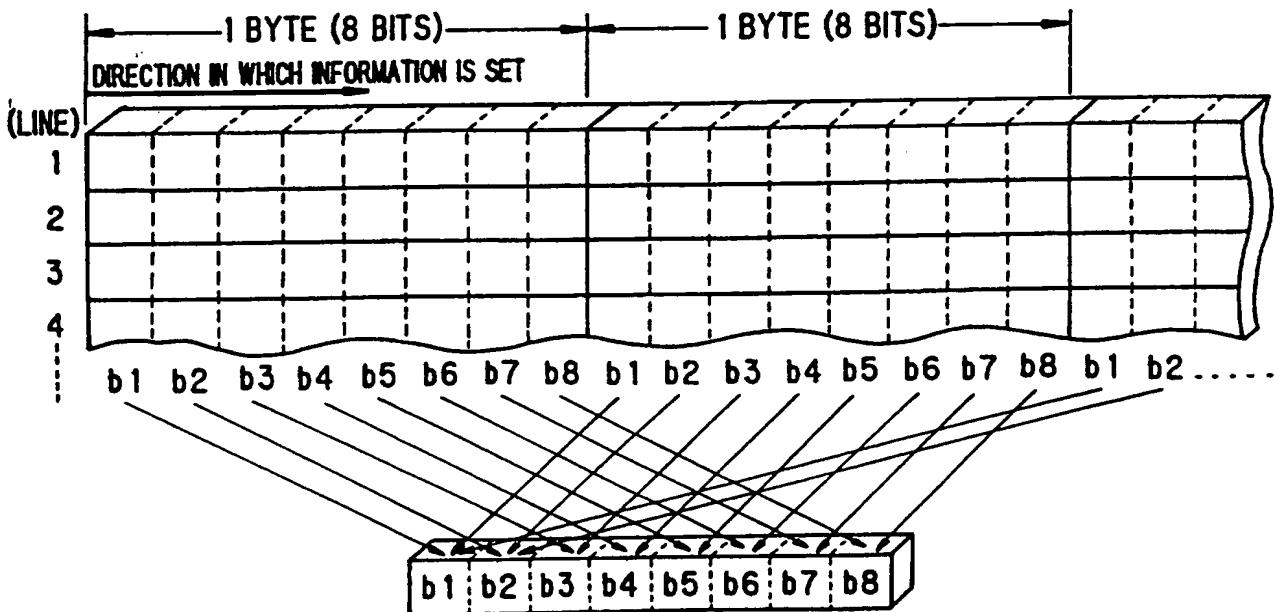
FIG. 20 (PRIOR ART)

FIG. 21 (PRIOR ART)

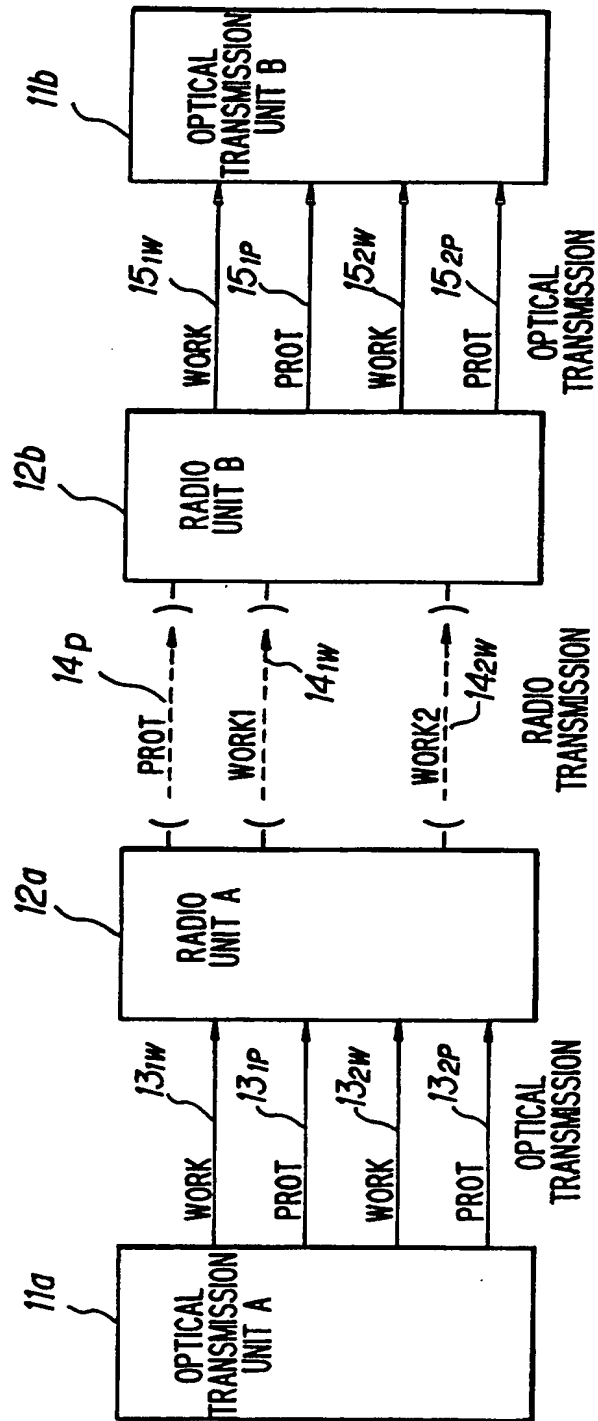


FIG. 22 (PRIOR ART)


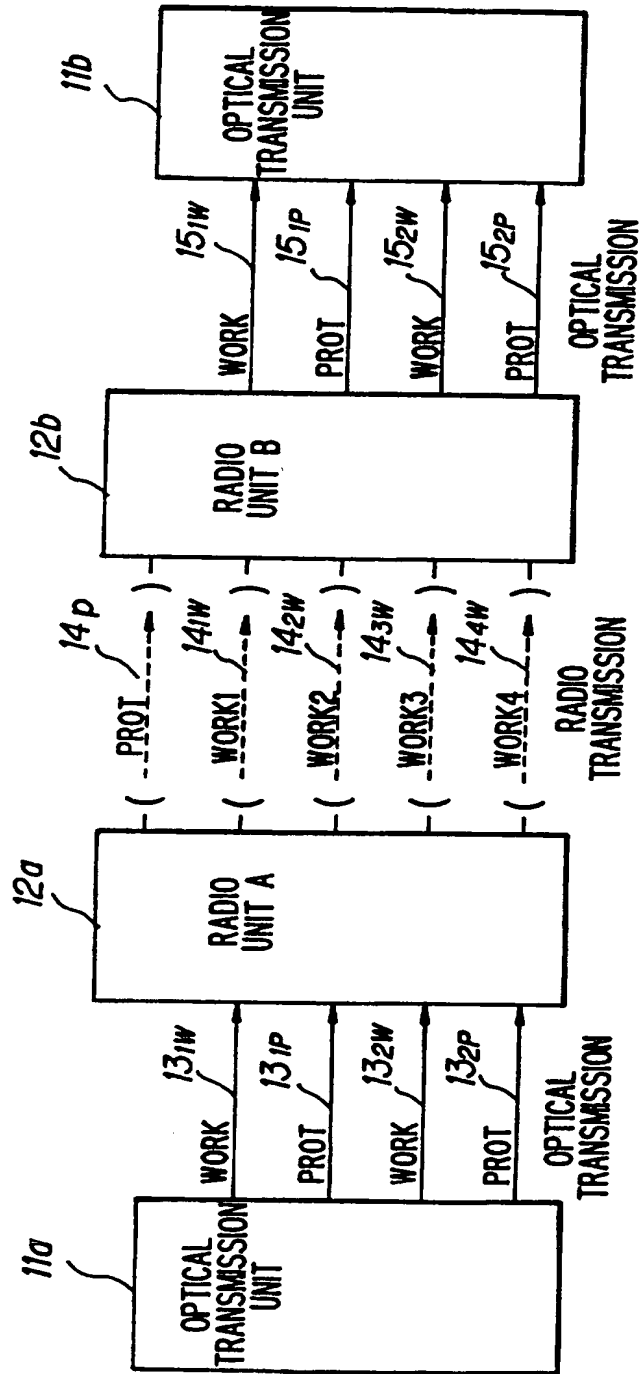


FIG. 24 (PRIOR ART)

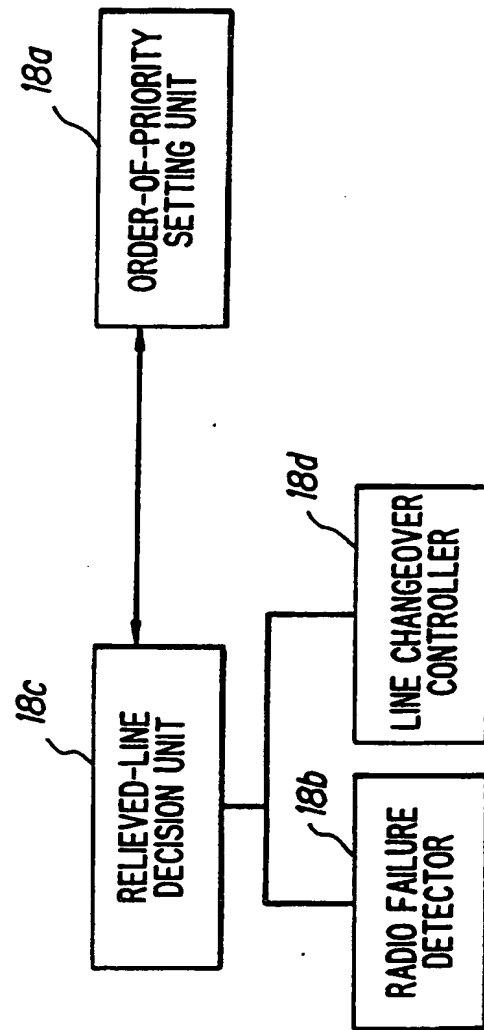

METHOD OF RADIO-LINE RELIEF AND RADIO EQUIPMENT IN SDH
NETWORK

5

This invention relates to a method of relieving a radio line and to radio equipment in a synchronous digital hierarchy (SDH) network. More particularly, the invention relates to a method of relieving a radio line
10 and to radio equipment in an SDH network in which a radio transmission line is installed between optical transmission lines having a plurality of optical lines.

The world-wide trend toward the adoption of the SDH scheme for networks in optical transmission is
15 continuing. Figs. 16A, 16B are diagrams for describing the structure of a frame in SDH. This is for a transmission rate of 155.52 Mbps. One frame is composed of 9×270 bytes. The first 9×9 bytes constitute section overhead (SOH), and the remaining bits
20 constitute path overhead (POH) and payload (PL).

The section overhead SOH is a section which transmits information (frame synchronizing information) representing the beginning of the frame, information specific to the transmission line (namely information
25 which checks for error at transmission time, information for network maintenance, etc.) and a pointer indicating the position of the path overhead POH. Path overhead POH is a section which transmits end-to-end monitoring

information within a network. The payload PL is a section which transmits 150 Mbps information.

The section overhead SOH is composed of repeater section overhead of 3×9 bytes, a pointer of 1×9 bytes and multiplex section overhead of 5×9 bytes. As shown in Fig. 17, the multiplex section refers to the section between terminal repeater units 1, 2. In a case where a number of transmission lines 3a - 3c and repeaters 4a, 4c are provided between the terminal
10 repeater units 1, 2, the repeater section refers to the section between both ends of one transmission line. The multiplex section is composed of a plurality of repeater sections.

As shown in Fig. 16B, the repeater section overhead
15 has bytes A1 - A2, C1, B1, E1, F1, D1 - D3, and the multiplex section overhead has bytes B2, K1 - K2, D4 - D12, Z1 - Z2. The meaning of each byte is illustrated in Fig. 18. The repeater section overhead transmits frame synchronizing signals (bytes A1, A2), an error
20 monitoring signal (byte B1) for monitoring error in the repeater section, a fault specifying signal (byte F1) for specifying a fault in the repeater section, etc. The multiplex section overhead transmits an error monitoring signal (byte B2) for monitoring error in the
25 repeater section, a changeover signal (byte K1) for changing over between a standby system and a working system, and a transfer signal (byte K2) for transferring the status in the multiplex section. The

repeater section overhead and multiplex section overhead have a number of undefined bytes. Use of these bytes is entrusted to the communications manufacturer concerned.

In Fig. 18, NNI, UNI, STM, BIP, AIS and FERF
5 signify network node interface, user network interface, synchronous transport module, bit interleaved parity, alarm indication signal and far end receive failure, respectively.

Fig. 19 is a diagram for describing the definitions
10 of bytes K1 and K2. The first four bits b1 - b4 of byte K1 indicate the type of changeover request. For example, these bits designate the changeover between operation and standby. The remaining four bits b5 - b8 of byte K1 indicate the number of a working transmission
15 line that has outputted a changeover request. The first four bits b1 - b4 of byte K2 indicate the number of a working line, the fifth bit b5 indicates the changeover configuration, and the sixth through eighth bits b6 - b8 indicate status of the transmission line.

20 Fig. 20 is a diagram for describing BIP. When corresponding bits of each pixel have been added on, BIP-8 identifies whether the result is an even number or an odd number. When corresponding bits at demarcation every three bytes have been added on, BIP-24 identifies
25 whether the result is an even number or an odd number.

An SDH frame is thus constructed and application of SDH to networks is progressing mainly in optical transmission. There are cases in which such an SDH

network incorporates a radio transmission line. For example, in a case where an SDH network is constructed across the ocean or across steep mountainous areas, an optical cable must be laid on the ocean floor or across
5 mountainous terrain. However, the work for laying such cables is a major undertaking and requires great expenditure. When an SDH network is constructed in areas where the laying of cable is difficult, as in the case of the ocean floor or steep mountain ranges, an
10 optical transmission line is laid as far as the entrance to the area, an optical transmission line is laid from the exit of the area and a radio transmission line is introduced between these two optical transmission lines.

Fig. 21 illustrates a first example of the
15 arrangement of an SDH network in which a radio transmission line is introduced into an optical transmission line. In this case transmission is performed while terminating the redundant lines of the optical transmission line. The network includes optical
20 transmission units 11a, 11b and radio units 12a, 12b. Optical transmission lines 13_{1w} - 13_{2p} are laid between the optical transmission unit 11a and the radio unit 12a. The optical transmission lines 13_{1w}, 13_{2w} are working lines, and the optical transmission lines 13_{1p},
25 13_{2p} are standby lines. The standby lines 13_{1p}, 13_{2p} become the working lines when failures develop in the working lines 13_{1w}, 13_{2w}, respectively. Identical data is transmitted on the working lines and standby lines.

Numerals 14_{1W}, 14_{2W} denote radio working lines provided in correspondence with the optical working lines 13_{1W}, 13_{2W}, respectively. Numeral 14_P represents one radio standby line. The radio unit 12a terminates
5 the optical standby lines and transmits data from the optical working lines 13_{1W}, 13_{2W} to the radio unit 12b via the radio working lines 14_{1W}, 14_{2W}. Further, when a fault has developed in one of the radio working lines 14_{1W}, 14_{2W}, the radio unit 12a transmits data, which has
10 been accepted from the corresponding optical working line, to the radio unit 12b via the radio standby line 14_P, thereby relieving the failed radio working line.

Optical transmission lines 15_{1W} - 15_{2P} are laid between the radio unit 12b and the optical transmission
15 unit 11b. The optical transmission lines 15_{1W}, 15_{2W} are working lines, and the optical transmission lines 15_{1P}, 15_{2P} are standby lines. The standby lines 15_{1P}, 15_{2P} become the working lines when failures develop in the working lines 15_{1W}, 15_{2W}, respectively. The radio unit
20 12b sends the optical working line 15_{1W} and the optical standby line 15_{1P} data accepted from the first radio working line 14_{1W} or radio standby line 14_P (at the time of failure), and sends the optical working line 15_{2W} and the optical standby line 15_{2P} data accepted from the
25 second radio working line 14_{2W} or radio standby line 14_P (at the time of failure). As a result, identical data is transmitted to the optical working lines and optical standby lines.

In Fig. 21, an optical working line and an optical standby line form a pair, at two of such pairs are provided. However, $N (\geq 2)$ pairs are provided ordinarily. More specifically, the optical lines
5 consists of N pairs of optical working lines and optical standby lines. The radio lines have radio working lines corresponding to the N -number of optical working lines as well as one radio standby line.

In accordance with this SDH network, radio working
10 lines in the radio section need only be provided to correspond to the optical working lines. As a result, the number of radio channels can be made small and transmission efficiency can be improved. However, in a case where a fault occurs simultaneously in two radio
15 working lines, only one line can be relieved. This results in a decline in network reliability.

Fig. 22 illustrates a second example of the arrangement of an SDH network in which a radio transmission line is introduced between optical
20 transmission lines. In this case radio transmission is performed without terminating the redundant lines of the optical transmission line. The network includes the optical transmission units 11a, 11b and the radio units 12a, 12b. The optical transmission lines 13_{1w} - 13_{2p} are
25 laid between the optical transmission unit 11a and the radio unit 12a. The optical transmission lines 13_{1w}, 13_{2w} are the working lines and the optical transmission lines 13_{1p}, 13_{2p} are the standby lines. The standby

lines 13_{1p}, 13_{2p} become the working lines when failures develop in the working lines 13_{1w}, 13_{2w}, respectively. Identical data is transmitted on the currently working lines and standby lines.

5 Radio working lines 14_{1w} - 14_{4w} are provided in correspondence with the optical working lines and optical standby lines 13_{1w} - 13_{2p}, respectively. Numeral 14_p represents the single radio standby line. The radio unit 12a transmits data from the optical working lines
10 13_{1w}, 13_{2w} to the radio unit 12b via the radio working lines 14_{1w}, 14_{3w} and transmits data from the optical standby lines 13_{1p}, 13_{2p} to the radio unit 12b via the radio working lines 14_{2w}, 14_{4w}. Further, when a fault has developed in one of the radio working lines 14_{1w} -
15 14_{4w}, the radio unit 12a transmits data, which has been accepted from the corresponding optical line, to the radio unit 12b via the radio standby line 14_p, thereby relieving the failed radio working line.

 The optical transmission lines 15_{1w} - 15_{2p} are laid
20 between the radio unit 12b and the optical transmission unit 11b. The optical transmission lines 15_{1w}, 15_{2w} are the working lines and the optical transmission lines 15_{1p}, 15_{2p} are the standby lines. The standby lines 15_{1p}, 15_{2p} become the working lines when failures develop
25 in the currently working lines 15_{1w}, 15_{2w}, respectively. The radio unit 12b (1) sends the optical working line 15_{1w} data accepted from the first radio working line 14_{1w} or from the radio standby line 14_p (at the time of

failure); (2) sends the optical standby line 15_{1p} data accepted from the second radio working line 14_{2w} or from the radio standby line 14_p (at the time of failure); (3) sends the optical working line 15_{2w} data accepted from the third radio working line 14_{3w} or from the radio standby line 14_p (at the time of failure); and (4) sends the optical standby line 15_{2p} data accepted from the fourth radio working line 14_{4w} or from the radio standby line 14_p (at the time of failure).

10 In Fig. 22, only two pairs of the optical working lines and optical standby lines are provided. However, $N (\geq 2)$ pairs are provided ordinarily. More specifically, the optical lines consist of N pairs of optical working lines and optical standby lines. The radio lines have radio working lines corresponding to the N -number of optical working lines and N -number of radio standby lines as well as one radio standby line.

20 In accordance with this SDH network, the transmission efficiency of the radio section is lower than that of the first arrangement described above but the reliability of the network is enhanced.

25 Fig. 23 illustrates a third example of the arrangement of an SDH network in which a radio transmission line is introduced into an optical transmission line. In this case radio transmission is performed without terminating the redundant lines of the optical transmission line. The network includes the optical transmission units 11a, 11b, the radio units

12a, 12b as well as optical transmission units 16a, 16b.. The optical transmission lines 13_{1W} - 13_{2P} are laid (1) between the optical transmission unit 11a and the radio unit 12a and (2) between the optical
5 transmission unit 11a and the optical transmission unit 16a. The optical transmission lines 13_{1W}, 13_{2W} are the working lines and the optical transmission lines 13_{1P}, 13_{2P} are the standby lines. The standby lines 13_{1P}, 13_{2P} become the working lines when failures develop in the
10 currently working lines 13_{1W}, 13_{2W}, respectively. Identical data is transmitted on the currently working lines and standby lines. The optical working line 13_{2W} and optical standby line 13_{1P} are connected to the radio unit 12a, and the optical working line 13_{1W} and optical
15 standby line 13_{2P} are connected to the optical transmission unit 16a.

The radio working lines 14_{1W}, 14_{2W} are provided in correspondence with the optical standby line 13_{1P} and optical working line 13_{2W}, respectively. Numeral 14_p
20 represents the single radio standby line. The radio unit 12a transmits data from the optical standby line 13_{1P} and optical working line 13_{2W} to the radio unit 12b via the radio working lines 14_{1W}, 14_{2W}. Further, when a fault has developed in one of the radio working lines
25 14_{1W}, 14_{2W}, the radio unit 12a transmits data, which has been accepted from the optical line corresponding to the radio working line that failed, to the radio unit 12b via the radio standby line 14_p, thereby relieving the

failed radio working line.

Optical transmission lines 17_w, 17_p are laid between the optical transmission unit 16a and the optical transmission unit 16, namely in parallel with the radio transmission lines. The line 17_w is an optical working line provided to correspond to the optical working line 13_{1w}, and the line 17_p is an optical standby line provided to correspond to the optical standby line 13_{2p}. The optical transmission unit 16a transmits data from the optical working line 13_{1w} and optical standby line 13_{2p} to the optical transmission unit 16b via the optical lines 17_w, 17_p.

The optical transmission lines 15_{1w} - 15_{2p} are laid (1) between the optical transmission unit 11b and the radio unit 12b and (2) between the optical transmission unit 11b and the optical transmission unit 16b. The optical transmission lines 15_{1w}, 15_{2w} are the working lines and the optical transmission lines 15_{1p}, 15_{2p} are the standby lines. The standby lines 15_{1p}, 15_{2p} become the working lines when failures develop in the currently working lines 15_{1w}, 15_{2w}, respectively. Identical data is transmitted on the working lines and standby lines. The optical working line 15_{2w} and optical standby line 15_{1p} are connected to the radio unit 12ba, and the optical working line 15_{1w} and optical standby line 15_{2p} are connected to the optical transmission unit 16a.

The radio unit 12b (1) sends the optical standby line 15_{1p} data accepted from the first radio working

line 14_{1w} or from the radio standby line 14_p (at the time of failure), and (2) sends the optical working line 15_{2w} data accepted from the second radio working line 14_{2w} or from the radio standby line 14_p (at the time of failure). The optical transmission unit 16b (1) sends the optical working line 15_{1w} data accepted from the optical working line 17_w, and (2) sends the optical standby line 15_{2p} data accepted from the optical standby line 17_p.

10 In Fig. 23, only two pairs of the optical working lines and optical standby lines are provided. However, $N (\geq 2)$ pairs are provided ordinarily. The radio lines consist of $2n$ -number of radio working lines corresponding to the $n (< N)$ optical working lines and n optical standby lines, as well as one radio standby line. The transmission lines provided in parallel with the radio lines have $(N-n)$ -number of optical working lines and $(N-n)$ -number of optical standby lines.

20 In accordance with this SDH network, network reliability can be improved over that of the second arrangement described above but higher construction costs are entailed because it is necessary to lay optical transmission lines in parallel with the radio lines.

25 Thus, a redundant configuration is adopted in which one channel among $(M+1)$ -number of channels in a radio section is used as a standby line and this standby line is shared by the working lines on the remaining M -number

of channels. The changeover between working and standby lines in the radio section is performed based upon parity added on uniquely in the radio section. The parity is, say, the byte B1 (see Fig. 18) in the
5 repeater section overhead. When parity error has occurred at a rate greater than a set rate, a failure is judged to have occurred and a changeover trigger is generated to perform the changeover between working and standby lines. For example, in the SDH network of Fig.
10 21, (1) when the radio unit 12b detects the occurrence of failure in the radio working line 14_{1W}, (2) the radio unit 12b is placed in a state in which it is capable of receiving data from both the radio working line 14_{1W} and the radio standby line 14_P. Next, (3) the radio unit
15 12b instructs the radio unit 12a, via an incoming standby line (not shown), to perform the working/standby changeover between the radio working line 14_{1W} and the radio standby line 14_P. (4) In response to the changeover command, the radio unit 12a performs the
20 working/standby changeover of the lines in sync with a synchronizing signal and transmits data via the standby line 14_P. (5) Thereafter, the radio unit 12b adopts the old standby line 14_P as the working line, accepts data from this line and transmits the data to the
25 optical lines 15_{1W}, 13_{1P}.

Fig. 24 is a diagram showing the configuration of a working/standby changeover controller, used when a failure develops in a radio line, in the radio unit 12b.

The controller includes a priority setting unit 18a for setting the relief priority of radio working lines, a radio failure detector 18b for detecting failure in each of the radio working lines, a relieved-line decision unit 18c which, when failure has occurred in two or more radio working lines simultaneously or in succession, refers to the set relief priority and relieves the radio working line having the highest priority, and a line changeover control unit 18d for controlling changeover between the radio working line, which has been decided by the relief line decision unit 18c, and the radio standby line. If there is only one radio working line that has failed, the relief line decision unit 18c relieves this line even if its priority is low.

15 In the prior art, the order of priority of relief in a case where a plurality of lines have failed in a radio section is fixed or is the order in which the failures occurred. In other words, the prior art is such that relief of a radio line that has developed a fault is performed without giving any consideration to the redundant configuration of the optical transmission lines or the state of failure occurrence in the transmission lines.

25 However, when the conventional relief method is considered in terms of the overall network, there are many instances in which the method is not efficient. For example, with the conventional relief method, there are occasions where a line that should be relieved early

on is not relieved whereas a line whose relief may be deferred to a later time is relieved first. In such case data communication cannot be carried out in a line exhibiting the worst conditions. This will be described
5 in detail with reference to Fig. 21. Assume a situation in which the optical lines 13_{1W}, 13_{1P} open due to a failure of some kind, thereby interrupting line service, under which condition a radio failure occurs in the radio working line 14_{1W} and then in the radio working
10 line 14_{2W}. According to the prior art in such case, the working/standby changeover is performed between the radio working line 14_{1W}, which developed the radio failure first, and the radio standby unit 14_P, thereby relieving the radio working line 14_{1W} and not the radio
15 working line 14_{2W}. With this method, however, data communication becomes impossible on all lines. If radio working line 14_{2W} were to have been relieved, communication of data from the optical line 13_{2W} would become possible. Though the foregoing is for a case in
20 which relief is performed in the order in which failure occurs, the results would be the same also in a case where the order of relief priority is fixed.

An example of another problem will be described with reference to Fig 22. Assume that a radio failure
25 has developed in the radio working line 14_{2W} and then in the radio working line 14_{1W}. According to the prior art in such case, the working/standby changeover is performed between the radio working line 14_{2W}, which

developed the radio failure first, and the radio standby unit 14_p, thereby relieving the radio working line 14_{2w} and not the radio working line 14_{1w}. In other words, in a case where radio failures occur in radio working lines corresponding to an optical working line and optical standby line, the conventional method is such that a situation arises in which the radio working line corresponding to the optical standby line is relieved but not the radio working line corresponding to the more important optical working line.

Further, in a case where a radio failure occurs simultaneously in the radio working lines 14_{2w}, 14_{4w} corresponding to the two optical standby lines 13_{1p}, 13_{2p}, the conventional method relieves whichever radio working line developed the failure first. When the line conditions of the optical working line 13_{1w} and optical working line 13_{2w} are compared, it is found that there is a case in which the likelihood is high that the working/standby changeover will be performed because the line condition of the optical working line 13_{2w} is poor. In such case the radio working line 14_{4w} corresponding to the optical standby line 13_{2p} should be relieved at a higher priority than the radio working line 14_{2w} corresponding to the optical standby line 13_{1p}. With the conventional method, however, the radio working line 14_{2w} corresponding to the optical standby line 13_{1p} is relieved but not the radio working line 14_{4w} corresponding to the optical standby line 13_{2p}.

Accordingly, an embodiment of the present invention may relieve a radio line upon taking into consideration the redundant configuration of an optical transmission line or the state of failure occurrence in
5 the optical transmission line.

A further embodiment of the present invention may lower the rank for relief of a radio line corresponding to a faulty optical line and to give priority to the
10 relief of a radio line corresponding to an optical line that is not faulty.

A further embodiment of the present invention may give a higher priority to the relief of a radio line corresponding to an optical working line than to a radio
15 line corresponding to an optical standby line.

A further embodiment of the present invention may give a higher priority to the relief of a radio line corresponding to an optical standby line of an optical working line having an unsatisfactory line condition
20 than to a radio line corresponding to an optical standby line of an optical working line having a satisfactory line condition.

According to a first aspect of the present invention, there is thus provided _____
25 _____ a method of relieving a radio line in an SDH network comprising the steps of providing radio working lines to correspond to respective ones of optical lines and providing one radio standby line; monitoring

occurrence of failure in each optical line and
occurrence of failure in the radio working lines; when
occurrence of a failure in an optical line has been
detected, making rank for relief of the radio working
5 line corresponding to this optical line lower than rank
for relief of radio working lines corresponding to
optical lines that have not failed; and when a failure
has occurred in two or more radio working lines,
transmitting data, which is to be sent to a radio
10 working line having a higher rank for relief, via the
radio standby line and relieving the radio working lines
in which the failure has occurred.

According to a second aspect of the present
invention, there is thus provided _____
15 _____ a method of relieving a radio line in an SDH
network comprising the steps of providing radio working
lines to correspond to respective ones of plural sets of
optical working lines and optical standby lines and
providing one radio standby line; making rank for relief
20 of radio working lines corresponding to optical working
lines higher than rank for relief of radio working lines
corresponding to optical standby lines; monitoring
occurrence of failure in each radio working line; and
when a failure has occurred in two or more radio working
25 lines, transmitting data, which is to be sent to a radio
working line having a higher rank for relief, via the
radio standby line and relieving the radio working lines
in which the failure has occurred.

According to a third aspect of the present invention, there is provided

a method of relieving a radio line in an SDH network comprising the steps of providing radio working
5 lines to correspond to respective ones of plural sets of optical working lines and optical standby lines and providing one radio standby line; monitoring line condition in each optical working line; monitoring occurrence of failure in radio working lines; making
10 rank for relief of a radio working line corresponding to an optical standby line in a pair with an optical working line having an unsatisfactory line condition higher than rank for relief of radio working lines corresponding to optical standby lines in pairs with
15 optical working lines having a satisfactory line condition; and when a failure has occurred in two or more radio working lines, transmitting data, which is to be sent to a radio working line having a higher rank for relief, via the radio standby line and relieving the
20 radio working lines in which the failure has occurred.

Further aspects of the invention are provided in accordance with the attached claims 8 to 16.

For a better understanding of the invention, and to show how the invention may be carried into effect, reference will now be made,
25 purely by way of example, to the accompanying drawings, in which:-

Fig. 1 is a block diagram for describing general principles of the present invention;

Fig. 2 is a diagram for describing a method of

relieving radio lines according to a first embodiment of the present invention;

Fig. 3 is a flowchart of processing for setting relief priority;

5 Fig. 4 is a flowchart of processing for line changeover;

Fig. 5 is a diagram for describing a method of relieving radio lines according to a second embodiment of the present invention;

10 Fig. 6 is a flowchart of processing for setting relief priority;

Fig. 7 is a flowchart of processing for line changeover;

15 Fig. 8 is a diagram for describing a method of relieving radio lines according to a third embodiment of the present invention;

Fig. 9 is a diagram showing the construction of a radio unit on a receiving end;

20 Figs. 10A, 10B, 10C and 10D are views for describing interfaces;

Fig. 11 is a block diagram showing an optical-line error counting unit;

Fig. 12 is a block diagram showing an optical-line changeover detecting unit;

25 Fig. 13 is a block diagram showing an optical standby/working recognition unit;

Fig. 14 is a block diagram showing the construction of a relief rank management unit;

Fig. 15 is a flowchart of processing for relief rank management;

Figs. 16A, 16B are diagrams for describing the structure of a frame in SDH;

5 Fig. 17 is a diagram for describing a multiplex section and a repeater section;

Fig. 18 is a diagram for describing multiplex section overhead and repeater section overhead;

10 Fig. 19 is a diagram for describing the definitions of bytes K1 and K2;

Fig. 20 is a diagram for describing BIP;

Fig. 21 is a diagram showing a first arrangement of an SDH network in which a radio transmission line is introduced between optical transmission lines;

15 Fig. 22 is a diagram showing a second arrangement of an SDH network in which a radio transmission line is introduced between optical transmission lines;

Fig. 23 is a diagram showing a third arrangement of an SDH network in which a radio transmission line is introduced between optical transmission lines; and

20

Fig. 24 is a diagram showing the configuration of a working/standby changeover controller used when a failure develops in a radio line.

25 (A) Overview of the invention

Fig. 1 is a block diagram for describing the principles of the present invention. Shown in Fig. 1 are the optical transmission units 11a, 11b, the radio

units 12a, 12b and optical transmission lines 13, 15.
The optical transmission line 13 has plural sets of
optical working lines 13_{1W}, 13_{2W} and optical standby
lines 13_{1P}, 13_{2P}, and the optical transmission line 15
5 has plural sets of optical working lines 15_{1W}, 15_{2W} and
optical standby lines 15_{1P}, 15_{2P}. A radio transmission
line 14, which is introduced between the optical
transmission lines 13 and 15, has radio working lines
14_{1W} - 14_{4W} corresponding to respective ones of the
10 optical working lines 13_{1W}, 13_{2W} and optical standby
lines 13_{1P}, 13_{2P}, as well as one radio standby line 14_P.

The radio unit 12b on the receiving end includes
monitoring means (an optical-line condition monitoring
unit) 21 for detecting the line condition in each
15 optical line, detecting means (an optical-line failure
detecting unit) 22 for detecting occurrence of failure
in each optical line, second detecting means (a radio-
line failure detecting unit) 24 for detecting occurrence
of failure in each radio working line, a relief-rank
20 management unit 25 for managing rank of relief for radio
working lines, and a line changeover controller 26
which, when a failure has developed in two or more radio
working lines, transmits data, which is to be sent to a
radio working line having a higher rank for relief, via
25 the radio standby line 14_P.

(a) First operation of the principal embodiment
The radio working lines 14_{1W} - 14_{4W} are provided to
correspond to prescribed optical lines and the single

radio standby line 14p is provided, these lines serving as the radio lines 14. The occurrence of failure in each of the optical lines is monitored by the optical-line failure detecting unit 22, and the occurrence of failure in each of the radio working lines is monitored by the radio-line failure detecting unit 24. When occurrence of a failure in an optical line has been detected, the relief-rank management unit 25 makes the rank for relief of the radio working line corresponding to this optical line lower than the rank for relief of radio working lines corresponding to optical lines that have not failed. When a failure has occurred in two or more radio working lines, the line changeover controller 26 changes over between working/standby of a radio working line having a higher rank for relief and the radio standby line 14p, and transmits data, which is to be sent to a radio working line that failed, via the radio standby line 14p. If this arrangement is adopted, the rank for relief of a radio line corresponding to a faulty optical line is lowered and priority can be given to relief of a radio line corresponding to an optical line that is not faulty. In other words, a radio line can be relieved upon giving consideration to the state of failure occurrence in the optical transmission line.

(b) Second operation of the principal embodiment

N-number of pairs of optical working lines 13_{1w} - 13_{2w} and optical standby lines 13_{1p} - 13_{2p} are provided as the optical transmission line 13. Radio working

lines 14_{1w} - 14_{4w} are provided to correspond to
respective ones of n ($\leq N$)-number of optical working
lines and n -number of optical standby lines, and the
single radio standby line 14_p is provided, these lines
5 serving as the radio lines 14. The relief-rank
management unit 25 makes the rank for relief of radio
working lines 14_{1w}, 14_{3w} corresponding to optical working
lines higher than the rank for relief of radio working
lines 14_{2w}, 14_{4w} corresponding to optical standby lines.
10 The radio-line failure detecting unit 24 monitors
occurrence of failure in each radio working line. When
a failure has occurred in two or more radio working
lines, the line changeover controller 26 changes over
between working/standby of a radio working line having a
15 higher rank for relief and the radio standby line 14_p,
and transmits data, which is to be sent to a radio
working line that failed, via the radio standby line
14_p. If this arrangement is adopted, it is possible to
give a higher priority to the relief of a radio line
20 corresponding to an optical working line than to a radio
line corresponding to an optical standby line. In
addition, it is possible to relieve a radio line upon
taking into consideration the redundant configuration of
the optical transmission line. Further, it is so
25 arranged that if $n < N$ holds, data from $(N-n)$ -number of
optical radio lines and
 $(N-n)$ -number of optical standby lines is transmitted via
optical transmission lines provided in parallel with

radio transmission lines. If this arrangement is adopted, the reliability of the network can be improved.

(c) Third operation of the principal embodiment

The radio working lines 14_{1W} - 14_{4W} are provided to
5 correspond to respective ones of the optical working
lines 13_{1W} - 13_{2W} and optical standby lines 13_{1P} - 13_{2P},
and the single radio standby line 14_P is provided, these
lines serving as the radio lines 14. The line condition
in each of the optical working lines is monitored by the
10 optical-line condition monitoring unit 21, and the
occurrence of failure in each of the radio working lines
is monitored by the radio-line failure detecting unit
24. The relief-rank management unit 25 makes the rank
for relief of a radio working line corresponding to an
15 optical standby line in a pair with an optical working
line having an unsatisfactory line condition higher than
the rank for relief of radio working lines corresponding
to optical standby lines in pairs with optical working
lines having a satisfactory line condition. When a
20 failure has occurred in two or more radio working lines,
the line changeover controller 26 changes over between
working/standby of a radio working line having a higher
rank for relief and the radio standby line 14_P, and
transmits data, which is to be sent to a radio working
25 line that failed, via the radio standby line 14_P. If
this arrangement is adopted, it is possible to give a
higher priority to the relief of a radio line
corresponding to an optical standby line in a pair with

an optical working line in an unsatisfactory condition than to a radio line corresponding to an optical standby line in a pair with an optical working line in a satisfactory condition. In other words, a radio line
5 can be relieved upon giving consideration to the line condition of in the optical transmission line.

(d) Fourth operation of the principal embodiment
N-number of pairs of optical working lines $13_{1W} - 13_{2W}$ and optical standby lines $13_{1P} - 13_{2P}$ are provided
10 as the optical transmission line 13. Radio working lines $14_{1W} - 14_{4W}$ are provided to correspond to respective ones of n ($\leq N$)-number optical working lines and n -number of optical standby lines, and the single radio standby line 14_P is provided, these lines serving
15 as the radio lines 14. The occurrence of failure in each of the optical lines is monitored by the optical-line failure detecting unit 22, and the occurrence of failure in each of the radio working lines is monitored by the radio-line failure detecting unit 24. (1) The
20 relief-rank management unit 25 makes the rank for relief of radio working lines corresponding to optical working lines higher than the rank for relief of radio working lines corresponding to optical standby lines. (2) When occurrence of failure has been detected in an optical
25 working line, the relief-rank management unit 25 makes the rank for relief of the radio working line corresponding to this optical working line lower than rank for relief of radio working lines corresponding to

optical working lines that have not failed. (3) When occurrence of failure has been detected in an optical standby line, the relief-rank management unit 25 makes the rank for relief of the radio working line

5 corresponding to this optical standby line lower than rank for relief of radio working lines corresponding to optical standby lines that have not failed. When a failure has occurred in two or more radio working lines, the line changeover controller 26 changes over between

10 working/standby of a radio working line having a higher rank for relief and the radio standby line 14p, and transmits data, which is to be sent to a radio working line that failed, via the radio standby line 14p. If this arrangement is adopted, it is possible to relieve a

15 radio line upon taking into consideration both the redundant configuration of the optical transmission line and the state of failure occurrence in the optical transmission line.

(e) Fifth operation of the principal embodiment

20 The radio working lines 14_{1W} ~ 14_{4W} are provided to correspond to respective ones of the optical working lines 13_{1W} ~ 13_{2W} and optical standby lines 13_{1P} ~ 13_{2P}, and the single radio standby line 14p is provided, these lines serving as the radio lines 14. The line condition

25 in each of the optical working lines is monitored by the optical-line condition monitoring unit 21, and the occurrence of failure in each of the radio working lines is monitored by the radio-line failure detecting unit

24. The relief-rank management unit 25 (1) makes the rank for relief of radio working lines corresponding to optical working lines higher than the rank for relief of radio working lines corresponding to optical standby lines, and (2) makes the rank for relief of a radio working line corresponding to an optical standby line in a pair with an optical working line having an unsatisfactory line condition higher than the rank for relief of radio working lines corresponding to optical standby lines in pairs with optical working lines having a satisfactory line condition. When a failure has occurred in two or more radio working lines, the line changeover controller 26 changes over between working/standby of a radio working line having a higher rank for relief and the radio standby line 14_p, and transmits data, which is to be sent to a radio working line that failed, via the radio standby line 14_p. If this arrangement is adopted, it is possible to relieve a radio line upon taking into consideration both the redundant configuration of the optical transmission line and the state of failure occurrence in the optical transmission line.

(f) Sixth operation of the principal embodiment
The radio working lines 14_{1w} - 14_{4w} are provided to correspond to respective ones of the optical working lines 13_{1w} - 13_{2w} and optical standby lines 13_{1p} - 13_{2p}, and the single radio standby line 14_p is provided, these lines serving as the radio lines 14. The optical-line

condition monitoring unit 21 monitors the line condition in each of the optical working lines, and the radio-line failure detecting unit 24 monitors the occurrence of failure in each of the radio working lines. (1) The relief-rank management unit 25 makes the rank for relief of radio working lines corresponding to optical working lines higher than the rank for relief of radio working lines corresponding to optical standby lines. (2) When occurrence of failure has been detected in an optical working line, the relief-rank management unit 25 makes the rank for relief of the radio working line corresponding to this optical working line lower than rank for relief of radio working lines corresponding to optical working lines that have not failed. (3) When occurrence of failure has been detected in an optical standby line, the relief-rank management unit 25 makes the rank for relief of the radio working line corresponding to this optical standby line lower than rank for relief of radio working lines corresponding to optical standby lines that have not failed. (4) The relief-rank management unit 25 makes the rank for relief of a radio working line corresponding to an optical standby line in a pair with an optical working line having an unsatisfactory line condition higher than the rank for relief of radio working lines corresponding to optical standby lines in pairs with optical working lines having a satisfactory line condition. When a failure has occurred in two or more radio working lines,

the line changeover controller 26 changes over between working/standby of a radio working line having a higher rank for relief and the radio standby line 14p, and transmits data, which is to be sent to a radio working line that failed, via the radio standby line 14p. If this arrangement is adopted, it is possible to relieve a radio line upon taking into consideration the redundant configuration of the optical transmission line, the line condition of the optical transmission line and the state of failure occurrence in the optical transmission line.

(B) First embodiment of the invention

Fig. 2 is a diagram for describing a method of relieving radio lines in an SDH network according to a first embodiment of the present invention. According to the first embodiment, a radio line corresponding to an optical line that is not faulty is relieved at a priority higher than that of a radio line corresponding to a faulty optical line. It should be noted that the first embodiment is applicable to the SDH networks shown in Figs. 21 - 23.

Shown in Fig. 2 are the optical transmission units 11a, 11b, radio units (terminal stations A) 12a, 12a' and radio units (terminal stations B) 12b, 12b'. The radio terminal stations 12a, 12b administer radio transmission/reception control of outgoing lines, and the radio terminal stations 12a', 12b' administer radio transmission/reception control of incoming lines. The optical transmission lines 13, 15 each have lines A - D.

In the case of Figs. 21 - 23, the optical lines A, C correspond to the optical working lines 13_{1W}, 13_{2W}; 15_{1W}, 15_{2W}, and the optical lines B, D correspond to the optical working lines 13_{1P}, 13_{2P}; 15_{1P}, 15_{2P}. The radio
5 transmission line 14, which is introduced between the optical transmission lines 13 and 15, has radio working lines 14_{1W} - 14_{4W} corresponding to respective ones of the optical working lines A - D and optical standby lines 13_{1P}, 13_{2P}, as well as one radio standby line 14_P.

10 Detectors 22a, 22b detect failure outside the radio section, e.g., failure in the optical lines. The radio-line failure detecting unit 24 detects failure in the radio lines, the relief-rank management unit 25 manages rank of relief for the radio lines, and the line
15 changeover controller 26 performs line changeover. These units are provided in the radio terminal station B.

The detector 22a detects failure which has occurred outside the radio section, namely failure which has
20 occurred in the optical lines A - D. For example, when a failure develops in optical line A, the optical transmission unit 11b on the receiving side sends the incoming A line a FERF (far end receive failure) signal indicating that a signal sent by the optical
25 transmission unit 11a on the transmitting side has not arrived. The FERF signal is sent using the bits b6 - b8 of the K2 byte in the multiplex section overhead (see Figs. 18 and 19). The detector 22a of the radio

terminal station 12b' accepts the K2 byte on each incoming line and detects the FERF signal on the A line.

The detector 22b detects a failure that has occurred ahead of the optical transmission unit 11a. In
5 a case where the location of the fault resides ahead of the optical transmission unit 11a, an MS-AIS (multiple section alarm indication signal) is sent in using the bits b6 - b8 of the K2 byte. The detector 22b detects this MS-AIS signal, thereby detecting the occurrence of
10 failure outside the radio section. Further, the detector 22b performs a parity check based upon the B2 byte and detects a B2 alarm, thereby detecting the occurrence of failure outside the radio section.

When occurrence of a failure in a line outside the
15 radio section has been detected by the detectors 22a, 22b, the relief-rank management unit 25 makes the rank for relief of the radio working line corresponding to this line lower than rank for relief of radio working lines corresponding to lines that have not failed,
20 thereby updating the order of priority for relief. The radio-line failure detecting unit 24 accepts the B1 byte of the repeater section overhead (see Fig. 18) from each of the radio working lines 14_{1W} - 14_{4W} and performs a parity check, thereby detecting failure in each of the
25 radio working lines. When a failure has occurred in two or more radio working lines, the line changeover controller 26 instructs the radio terminal station A, via the incoming standby line, to change over between

working/standby of a radio working line having a higher rank for relief and the radio standby line 14_p.

Fig. 3 is a flowchart of processing for setting relief priority, and Fig. 4 is a flowchart of processing for line changeover. It will be assumed that a failure has occurred in optical line A and that a double failure has occurred in lines A and B in the radio section.

The detectors 22a, 22b for detecting optical line failure monitor the occurrence of failure in each optical line, and the radio-line failure detecting unit 24 monitors the occurrence of failure in the radio working lines. When a failure occurs in the optical line A, the detector 22a detects the FERF signal, recognizes the failure in line A and so notifies the relief-rank management unit (step 101). Upon being notified of the occurrence of failure in optical line A, the relief-rank management unit 25 makes the rank for relief of the radio working line 14_{1w} corresponding to the optical line A lower than rank for relief of the radio working lines 14_{2w} - 14_{4w} corresponding to optical lines B, C, D that have not failed (step 102).

When a failure has occurred in two or more radio lines A, B (radio working lines 14_{1w}, 14_{2w}) under these conditions, the radio-line failure detecting unit 24 detects the failure and so notifies the line changeover controller 26 (step 103).

In response to such notification, the line changeover controller 26 acquires the order of priority

for relief of the radio lines A and B from the relief-rank management unit 25 and determines the fact that the order of priority for relief of radio line B is higher than that for relief of radio line A (step 104). As a result, the line changeover controller 26 instructs the radio terminal station 12a', via the incoming standby line, to change over between working/standby of the radio line B (radio working line 14_{2w}) having the higher rank for relief and the radio standby line 14_p. The radio terminal station 12a performs the changeover between working/standby of the designated radio line B and the radio standby line 14_p and transmits data, which is to be sent to the radio line B that failed, via the radio standby line 14_p (step 105).

It should be noted that if only one radio line has failed, the radio line is relieved even if its priority is low. However, when a failure occurs simultaneously in another radio line having a high order of priority for relief, this other radio line is relieved.

Thus, in accordance with the first embodiment, the rank for relief of a radio line corresponding to a faulty optical line is lowered and priority can be given to relief of a radio line corresponding to an optical line that is not faulty.

(C) Second embodiment of the invention

Fig. 5 is a diagram for describing a method of relieving radio lines in an SDH network according to a second embodiment of the present invention. According

to the second embodiment, a higher priority is given to the relief of a radio line corresponding to an optical working line than to a radio line corresponding to an optical standby line. It should be noted that the
5 second embodiment is applicable to the SDH networks shown in Figs. 21 - 23.

Shown in Fig. 5 are the optical transmission units 11a, 11b, radio units (terminal stations A) 12a, 12a' and radio units (terminal stations B) 12b, 12b'. The
10 radio terminal stations 12a, 12b administer radio transmission/reception control of outgoing lines, and the radio terminal stations 12a', 12b' administer radio transmission/reception control of incoming lines. The optical transmission line 13 has radio working lines
15 13_{1w}, 13_{2w} and optical standby lines 13_{1p}, 13_{2p}, and the optical transmission line 15 has radio working lines 15_{1w}, 15_{2w} and optical standby lines 15_{1p}, 15_{2p}. The optical working line 13_{1w} ($i = 1, 2, \dots$) and the optical standby line 13_{1p} form a pair. When a failure
20 has occurred in an optical working line 13_{1w}, a changeover is made between working/standby of the optical working line 13_{1w} and the optical standby line 13_{1p}. The radio transmission line 14, which is introduced between the optical transmission lines 13 and
25 15, has radio working lines 14_{1w} - 14_{4w} corresponding to respective ones of the optical working lines 13_{1w}, 13_{2w} and optical standby lines 13_{1p}, 13_{2p}, as well as one radio standby line 14_p.

Numeral 22' denotes an optical standby/working recognition unit for determining whether a line is operating as a working line or as a standby line. An optical-line changeover detector 23 for detecting a
5 working/standby changeover request. The radio-line failure detecting unit 24 detects failure in the radio lines, the relief-rank management unit 25 manages rank of relief for the radio lines, and the line changeover controller 26 performs line changeover. These units are
10 provided in the radio terminal station B.

On the basis of the information indicated by the K2 byte (bits b1 - b4) on an outgoing line and information, held as initially set information, indicating whether a line is working or standby (0010 indicating a working
15 line and 0001 indicating a standby line), the optical standby/working recognition unit 22' determines whether the line is operating as a standby line or as a working line and notifies the relief-rank management unit 25 of the results. For example, if the K2 byte (b1 - b4)
20 which arrives via the optical line A is 0010, then the line A is judged to be a working line. If the K2 byte (b1 - b4) which arrives via the optical line A is 0001, then the line A is judged to be a standby line.

The optical-line changeover detector 23 refers to
25 K1 (b1 - b4) on the incoming lines, detects a working → standby, standby → working changeover request and notifies the relief-rank management unit 25.

On the basis of working/standby of optical lines A

- D discriminated by the optical standby/working recognition unit 22', the relief-rank management unit 25 makes the order of priority for relief of radio working lines corresponding to optical working lines higher than the order of priority for relief of radio working lines corresponding to optical standby lines. More specifically, in the example of Fig. 5, the relief-rank management unit 25 makes the order of priority for relief of radio working lines 14_{1W}, 14_{3W} corresponding to the optical working lines 13_{1W}, 13_{2W} higher than the order of priority for relief of radio working lines 14_{2W}, 14_{4W} corresponding to optical standby lines 13_{1P}, 13_{2P}. Further, when notification of detection of the optical-line working/standby changeover request is received from the optical-line changeover detector 23, the relief-rank management unit 25 changes the order of priority. For example, notification of the standby/working changeover of line A/line B is received, the relief-rank management unit 25 first changes the order of priority for relief of the lines A, B to the same level and establishes the following order of priority: standby line A → working line A, working line B → working line B). Next, the relief-rank management unit 25 verifies end of the changeover operation in accordance with (1), (2) below. Specifically, end of the changeover operation is verified based upon (1) reversal of the K2 byte (b1 - b4) on the relevant outgoing lines A, B, and (2)

disappearance of a changeover request code in the K1
byte (b1 - b4) on the relevant incoming lines A, B. If
end of the changeover operation is verified, the relief-
rank management unit 25 changes the order of priority
5 (working line A → working line A, working line B →
standby line B).

Fig. 6 is a flowchart of processing for setting
relief priority, and Fig. 7 is a flowchart of processing
for line changeover. Initially, a 0 system, 1 system
10 (standby system, working system) setting is made for
each line and operation is started (step 201).

Next, the optical standby/working recognition unit
22' accepts the K2 byte (b1 - b4) line by line and
notifies the relief-rank management unit 25. The latter
15 discriminates the standby/working state of each of the
lines A - D and, based upon the results, makes the order
of priority for relief of the radio working lines 14_{1w},
14_{3w} corresponding to the optical lines B, D (13_{1w}, 13_{2w})
higher than the order of priority for relief of the
20 radio working lines 14_{2w}, 14_{4w} corresponding to the
optical lines A, C (13_{1p}, 13_{2p}) (step 202).

Next, if the optical-line changeover detector 23
detects the optical-line standby/working changeover
request by referring to the K1 byte (b1 - b4) on the
25 incoming lines, the detector 23 so notifies the relief-
rank management unit 25. It is assumed here that a
standby/working changeover request for the optical line
A (optical standby line 13_{1p}) has been detected (step

203).

Upon receiving notification of detection of the standby/working changeover request for the optical line A from the optical-line changeover detector 23, the relief-rank management unit 25 changes the order of priority of the radio working line corresponding to optical line A. More specifically, the relief-rank management unit 25 raises the order of priority for relief of the radio working line 14_{2W} corresponding to the optical line A to the same level as that of the radio working line corresponding to the optical working line (step 204). Thereafter, the K2 byte (b1 - b4) of the outgoing line A reverses (step 205) and the changeover request code in the K1 byte (b1 - b4) on the incoming line A vanishes (step 206).

The discussion above focuses only on the optical line A. However, a standby/working changeover request for the optical line B (optical working line 13_{1W}) in the pair with the optical line A also is issued at the same time and the relief-rank management unit 25 lowers the order of priority for relief of the radio working line 14_{1W} corresponding to the optical line B to the same level as that of the radio working line corresponding to the optical standby line.

When a failure has occurred in two or more radio lines A, B (radio working lines 14_{1W}, 14_{2W}) under these conditions, the radio-line failure detecting unit 24 detects the failure and so notifies the line changeover

controller 26 (step 207).

In response to such notification, the line
changeover controller 26 acquires the order of priority
for relief of the lines A, B (radio working lines 14_{1w},
5 14_{2w}) from the relief-rank management unit 25 and
determines the fact that the order of priority for
relief of radio line A is higher than that for relief of
radio line B (step 208). As a result, the line
changeover controller 26 instructs the radio terminal
10 station 12a', via the incoming standby line, to change
over between working/standby of the radio line A (radio
working line 14_{2w}) having the higher rank for relief and
the radio standby line 14_p. The radio terminal station
12a performs the changeover between working/standby of
15 the designated radio line A and the radio standby line
14_p and transmits data, which is to be sent to the radio
working line 14_{2w} that failed, via the radio standby
line 14_p (step 209).

Thus, the second embodiment is so adapted that when
20 a dual failure occurs in radio lines, it is possible to
give a higher priority to the relief of a radio line
corresponding to an optical working line than to a radio
line corresponding to an optical standby line. As a
result, a radio line can be relieved while taking into
25 consideration the redundancy of the optical transmission
line.

In a case where the second embodiment is applied to
the SDH network shown in Fig. 23, N-number of pairs of

the optical working lines and optical standby lines are provided. In addition, radio working lines are provided to correspond to respective ones of n ($< N$)-number of optical working lines and n -number of optical standby
5 lines, and a single radio standby line is provided, these lines serving as the radio lines 14. Further, data from $(N-n)$ -number of optical radio lines and $(N-n)$ -number of optical standby lines is transmitted via optical transmission lines provided in parallel with the
10 radio transmission lines. With regard to the n -pairs of radio lines, the second embodiment described above is applied. If this arrangement is adopted, the reliability of the network can be improved.

(D) Second embodiment of the invention

15 Fig. 8 is a diagram for describing a method of relieving radio lines in an SDH network according to a third embodiment of the present invention. According to the third embodiment, a radio line is relieved upon giving consideration to line condition in an optical
20 transmission line. It should be noted that the third embodiment is applicable to the SDH networks shown in Figs. 21 - 23.

Shown in Fig. 8 are the optical transmission units 11a, 11b, the radio unit (terminal station A) 12a and
25 the radio unit (terminal station B) 12b. The optical transmission line 13 has radio working lines 13_{1W}, 13_{2W} and optical standby lines 13_{1P}, 13_{2P}, and the optical transmission line 15 has radio working lines 15_{1W}, 15_{2W}

and optical standby lines 15_{1p}, 15_{2p}. The optical working line 13_{iW} (i = 1, 2, ...) and the optical standby line 13_{iP} form a pair. When a failure has occurred in an optical working line 13_{iW}, a changeover
5 is made between working/standby of the optical working line 13_{iW} and the optical standby line 13_{iP}. The radio transmission line 14, which is introduced between the optical transmission lines 13 and 15, has radio working lines 14_{1W} - 14_{4W} corresponding to respective ones of the
10 optical working lines 13_{1W}, 13_{2S} and optical standby lines 13_{1P}, 13_{2P}, as well as one radio standby line 14_P.

An optical-line error counter 21 performs a parity check using the B2 bytes on the outgoing lines corresponding to the optical working lines 13_{1W}, 13_{2W} and
15 counts the number of parity errors. The relief-rank management unit 25 accepts the error count of each line corresponding to the working lines 13_{1W}, 13_{2W}, ascertains the line condition based upon the magnitude of the count and makes the rank for relief of a radio working line
20 corresponding to an optical standby line in a pair with a line having a large error count higher than the rank for relief of radio working lines corresponding to optical standby lines in pairs with optical working lines having a satisfactory line condition.

25 In a case where radio failure has occurred simultaneously in the radio working lines 14_{2W}, 14_{4W} corresponding to the optical standby lines 13_{1P}, 13_{2P}, the order of priority for relief must be decided in the

following manner: Specifically, the order of priority for relieving the radio working lines 14_{2W}, 14_{4W} must be decided based upon the degree to which changeover of the optical working lines 13_{1W}, 13_{2W} in pairs with the optical standby lines 13_{1P}, 13_{2P} from the working state to the standby state due to a decline in quality is possible. For example, assume that priority for relief has been given to the radio working line 14_{2W} corresponding to the optical standby line 13_{1P} rather than to the radio working line 14_{2W} corresponding to the optical standby line 13_{2P}. In such case, assume that the optical working line 13_{2W} subsequently changes over to standby owing to a decline in quality and that the optical standby line 13_{2P} changes over to working. If this occurs, the radio working line 14_{4W} corresponding to the optical line 13_{2P} fails in the radio section and, hence, data communication can no longer be performed between the optical transmission units 11a, 11b. Accordingly, the radio unit 12b monitors the B2 byte and ascertains the line quality of the optical working lines, whereby the radio working line corresponding to the optical standby line in the pair with the optical working line having an unsatisfactory line quality is relieved at a priority higher than that of the radio working lines corresponding to the other optical standby lines.

(E) Modifications

The first embodiment decides the order of priority

for relief upon taking into account the occurrence of failure outside the radio section, the second embodiment decides the order of priority for relief upon taking into account whether an optical line is working or
5 standby, and the third embodiment decides the order of priority for relief upon taking into account the line quality of an optical working line. The first through third embodiments can be combined in suitable fashion to decide the order of priority for relief.

10 (a) Combination of first and second embodiments

(1) The relief-rank management unit 25 makes the rank for relief of radio working lines corresponding to optical working lines higher than the rank for relief of radio working lines corresponding to optical standby
15 lines. (2) When occurrence of failure has been detected in an optical working line, the relief-rank management unit 25 makes the rank for relief of the radio working line corresponding to this optical working line lower than rank for relief of radio working lines
20 corresponding to optical working lines that have not failed. (3) When occurrence of failure has been detected in an optical standby line, the relief-rank management unit 25 makes the rank for relief of the radio working line corresponding to this optical standby
25 line lower than rank for relief of radio working lines corresponding to optical standby lines that have not failed. When a failure has occurred in two or more radio working lines, the line changeover controller 26

changes over between working/standby of a radio working line having a higher rank for relief and the radio standby line 14p, and transmits data, which is to be sent to a radio working line that failed, via the radio standby line 14p.

(b) Combination of second and third embodiments

The relief-rank management unit 25 (1) makes the rank for relief of radio working lines corresponding to optical working lines higher than the rank for relief of radio working lines corresponding to optical standby lines, and (2) makes the rank for relief of a radio working line corresponding to an optical standby line in a pair with an optical working line having an unsatisfactory line condition higher than the rank for relief of radio working lines corresponding to optical standby lines in pairs with optical working lines having a satisfactory line condition. When a failure has occurred in two or more radio working lines, the line changeover controller 26 changes over between working/standby of a radio working line having a higher rank for relief and the radio standby line, and transmits data, which is to be sent to a radio working line that failed, via the radio standby line.

(c) Combination of first, second and third embodiments

(1) The relief-rank management unit 25 makes the rank for relief of radio working lines corresponding to optical working lines higher than the rank for relief of

radio working lines corresponding to optical standby lines. (2) When occurrence of failure has been detected in an optical working line, the relief-rank management unit 25 makes the rank for relief of the radio working line corresponding to this optical working line lower than rank for relief of radio working lines corresponding to optical working lines that have not failed. (3) When occurrence of failure has been detected in an optical standby line, the relief-rank management unit 25 makes the rank for relief of the radio working line corresponding to this optical standby line lower than rank for relief of radio working lines corresponding to optical standby lines that have not failed. (4) The relief-rank management unit 25 makes the rank for relief of a radio working line corresponding to an optical standby line in a pair with an optical working line having an unsatisfactory line condition higher than the rank for relief of radio working lines corresponding to optical standby lines in pairs with optical working lines having a satisfactory line condition. When a failure has occurred in two or more radio working lines, the line changeover controller 26 changes over between working/standby of a radio working line having a higher rank for relief and the radio standby line, and transmits data, which is to be sent to a radio working line that failed, via the radio standby line.

(F) Construction of radio unit

(a) Overall construction

Fig. 9 is a block diagram showing radio unit on the receiving end in a case where the first, second and third embodiments are combined. The radio unit includes the optical-line error counter 21 for counting errors on each optical line, the optical-line failure detecting unit 22 having the detectors 22a, 22b (see Fig. 2) for detecting failure outside the radio section, the optical standby/working recognition unit 22' for determining whether a line is operating as a working line or as a standby line, the optical-line changeover detector 23 for detecting a working/standby changeover request, the radio-line failure detecting unit 24 for detecting failure in the radio lines, the relief-rank management unit 25 for managing the rank of relief for the radio lines, the line changeover controller 26 for controlling changeover of the optical lines, and a relieved-line decision unit 27 for discriminating a radio working line having a high order of priority for relief.

(b) Interfaces

Figs. 10A - 10D are views for describing interfaces between various units. Fig. 10A shows the interface between the optical-line error counter 21 and relief-rank management unit 25, Fig. 10B the interface between the optical-line changeover detector 23 and relief-rank management unit 25, Fig. 10C the interface between the optical-line failure detecting unit 22, optical standby/working recognition unit 22' and the relief-rank

management unit 25, and Fig. 10D the interface between the relieved-line decision unit 27 and relief-rank management unit 25.

5 The relief-rank management unit 25 reads the count of errors on each line out of the optical-line error counter unit 21 as eight-bit data at prescribed times and ascertains the line quality.

10 When a changeover request has been detected by the optical-line changeover detector 23, the relief-rank management unit 25 reads, as eight-bit data from the optical-line changeover detector 23, an optical standby/working pair code and the K1 byte (b1 - b4) on the incoming lines and recognizes a working → standby, standby → working changeover of two lines constructing
15 the pair designated by the pair code. In order to detect reversal of the K2 byte (b1 - b4) on the outgoing lines and disappearance of the changeover request of the K1 byte (b1 - b4) on the incoming lines, the relief-rank management unit 25 reads these items of data from the
20 optical standby/working recognition unit 22' and optical-line changeover detector 23. It should be noted that the optical standby/working pair codes are of 16 types 0000 - 1111. Correspondence between pair codes and the two lines constructing each pair is established
25 in advance.

Furthermore, when failure outside of the radio section has been detected by the optical-line failure detecting unit 22, the relief-rank management unit reads

the K2 byte (b6 - b8) on the incoming lines and the K2 byte (b6 - b8) on the outgoing lines from the optical-line failure detecting unit 22.

In response to start of operation after initial settings have been made, the relief-rank management unit 25 reads information indicative of the 0 system or 1 system held as initially set information as well as the K2 byte (b1 - b4) and recognizes whether each line is working or standby.

10 (c) Construction of optical-line error counter

Fig. 11 is a block diagram showing the construction of the optical-line error counter 21. The counter 21 includes error detectors 21a₁ - 21a_N for monitoring the B2 byte of respective ones of the lines, performing a parity check using the B2 byte and detecting the number of errors on the respective lines, and counters 21b₁ - 21b_N for counting the number of errors per prescribed period of time on respective ones of the lines. The relief-rank management unit 25 reads the counts (the error counts) of the counters 21b₁ - 21b_N and clears the contents thereof at a prescribed period.

(d) Construction of optical-line changeover detector

Fig. 12 is a block diagram showing the construction of the optical-line changeover detector 23. The portion of the detector 23 shown here is for handling two of the N-number of lines. The optical-line changeover detector 23 includes K1-byte detectors 23a₁ - 23a_N for detecting

the K1 byte (b1 - b4) on respective ones of the incoming lines and outputting the same, changeover-code detectors 23b₁ - 23b_N for outputting high-level signals IR₁ - IR_N upon detecting a standby/working changeover code from the K1 byte (b1 - b4), registers 23c₁ - 23c_N for storing the correspondence between a pair code, which has been initially set, and the two lines constructing the pair, registers 23d₁ - 23d_N for storing the detected K1 byte (b1 - b4), and an OR gate 23e for outputting an interrupt signal INT when a changeover code has been detected on any line. When the interrupt signal INT has been generated, the relief-rank management unit 25 recognizes the pair of lines to undergo the standby/working changeover by reading (1) the pair codes that have been set in the registers 23c₁ - 23c_N and (2) the K1 byte (b1 - b4) that has been set in the registers 23d₁ - 23d_N.

(e) Construction of optical standby/working recognition unit

Fig. 13 is a block diagram showing the construction of the optical standby/working recognition unit 22'. The portion of the unit 22' shown here is for handling one of the N-number of lines. In the description rendered thus far, the optical-line failure detecting unit 22 and the optical standby/working recognition unit 22' have been discussed separately. In the actual arrangement, however, the function for detecting optical line failure is incorporated in the optical

standby/working recognition unit 22'.

The optical standby/working recognition unit 22' includes incoming K2-byte detectors 22a₁' - 22a_N' for detecting the K2 byte (b6 - b8) on respective ones of the incoming lines and outputting the same, outgoing K2-byte detectors 22b₁' - 22b_N' for detecting the K2 byte (b6 - b8) on respective ones of the outgoing lines and outputting the same, relevant-code detectors 22c₁' - 22c_N' for outputting high-level signals S₁ - S_N, respectively, upon detecting (1) relevant information (FERF/MS-AIS) of the K2 byte (b1 - b4) and relevant information (working/standby reversal) of the K2 byte (b1 - b4), registers 22d₁' - 22d_N' for storing working/standby setting information set before operation, registers 22e₁' - 22e_N' for storing the incoming K2 byte (b6 - b8) that has been detected, registers 22f₁' - 22f_N' for storing the outgoing K2 byte (b1 - b8) that has been detected, and an OR gate 22g for taking the OR of the signals S₁ - S_N and outputting an interrupt signal INT'.

When the interrupt signal INT' has been generated, the relief-rank management unit 25 reads the working/standby setting information that has been set in the registers 22d₁' - 22d_N', the incoming K2 byte (b6 - b8) information that has been set in the registers 22e₁' - 22e_N' and the outgoing K2 byte (b1 - b8) information that has been set in the registers 22f₁' - 22f_N', and identifies occurrence of failure outside the radio

section as well as standby/working lines.

(f) Construction of relief-rank management unit

Fig. 14 is a block diagram showing the construction of the relief rank management unit 25. The relief-rank management unit 25 includes a processor (CPU) 25a for sending/receiving information in accordance with the above-mentioned interfaces and executing processing for setting the rank of relief for radio lines, a setting/rewrite common RAM (a standby common RAM) 25b for storing a relief order-of-priority table, a notification common RAM (active common RAM) 25c for storing a relief order-of-priority table, and a selector 25d controlled by the CPU 25a.

The relief order-of-priority table holds relief ranks in correspondence with respective ones of the line numbers. The table is read by the relieved-line decision unit 27 using the interface of Fig. 10D via the notification common RAM 25c. When (1) line failures in a plurality of lines are detected simultaneously or (2) a failure occurs in one line when another line has been changed over for relief, the relieved-line decision unit 27 refers to the latest relief order-of-priority table, decides upon a radio line to be relieved preferentially and instructs the line changeover controller 26 to relieve this line.

The two common RAMs, namely the RAM for setting/rewrite (standby system) and the RAM for notification (active system), are provided for the

purpose of protection in a case where reading in of the table by the relieved-line decision unit 27 and the writing of the table by the CPU 25a are carried out simultaneously. In a case where setting/rewriting of order of priority is carried out, the CPU 25a writes the altered table in each of the common RAMs 25b, 25c and controls the selector 25d at the same time as the end of the rewriting operation so that the relieved-line decision unit 27 is capable of accessing the notification common RAM 25c. This arrangement assures that a situation will not arise in which reading in of the table by the relieved-line decision unit 27 and the writing of the table in the common RAMs by the CPU 25a take place simultaneously.

15 (g) Processing for management of order of priority

Fig. 15 is a flowchart of processing for relief rank management performed by the relief-rank management unit 25.

The 0/1-system (standby/working) code and the pair code are set for each line before the start of operation. When operation is started under these settings, the relief-rank management unit 25 collects the 0/1-system (standby/working) codes and the pair codes that have been set (step 301).

25 Next, the relief-rank management unit reads the K2 byte (b1 - b4) of each line from the optical standby/working recognition unit 22', compares the K2 byte (b1 - b4) and the initially 0/1-system code

(0001/0010) and makes the working/standby determination (step 302).

If it is possible to ascertain whether each line is working or standby, then the relief-rank management unit
5 25 makes the rank for relief of a working line higher than that for relieve of a standby line (step 303). It should be noted that initially the ranks for relief of the working lines are made the same level and the ranks for relief of the standby lines are made the same level,
10 and that the rank for relief is then altered in dependence upon the occurrence of failure outside the radio section and the quality of the line (the condition of the line).

Next, an error-count collection timer is started
15 (step 304). Thereafter, a check is performed to determine whether FERF/B2ALM/MS-AIS has been detected by the optical standby/working recognition unit 22', namely whether a failure has occurred outside the radio section (step 305). If a failure has occurred outside the radio
20 section, the K2 byte (b6 - b8) on the outgoing lines and the K2 byte (b6 - b8) on the incoming lines are read by the optical standby/working recognition unit 22'. If the faulty line is a working line, the relief rank is made the lowest among the working lines. If the faulty
25 line is a standby line, the relief rank is made the lowest among the standby lines (step 306).

Next, it is determined whether a standby/working changeover request has been detected by the optical-line

changeover detector 23 (step 307). If this changeover request has been detected, the pair code and the K1 byte (b1 - b4) of the incoming lines are read from the optical-line changeover detector 23. In a case where
5 line changeover is working → standby, the relief rank of the line is changed to the standby rank. If the line changeover is standby → working, the relief rank of the line is changed to the working rank (step 308).

Next, it is determined whether the error-count
10 collection timer has run out of time (step 309). If time has not run out, then processing from step 305 onward is repeated. If time runs out, however, the error count of each line is acquired from the optical-line error counter 21 (step 310), the line condition of
15 each optical working line is ascertained based upon the magnitude of the error count and the rank for relief of a radio working line corresponding to an optical standby line in a pair with an optical working line having an unsatisfactory line condition is made higher than the
20 rank for relief of radio working lines corresponding to optical standby lines in pairs with optical working lines having a satisfactory line condition (step 311). The program then returns to step 304 and repeating from this step onward is repeated.

25 Thus, the rank _____
for relief of a radio line corresponding to a faulty optical line is reduced. As a result, it is possible to give priority to relief of a radio line corresponding to

an optical line that is not faulty. In other words, it is possible to relieve a radio line upon taking into consideration the state of failure occurrence in an optical transmission line.

5 Thus, it is _____
possible to give a higher priority to the relief of a radio line corresponding to an optical working line than to a radio line corresponding to an optical standby line. As a result, it is possible to relieve a radio
10 line upon taking into consideration the redundancy of an optical transmission line.

 It is _____
possible to give a higher priority to the relief of a radio line corresponding to an optical standby line in a
15 pair with an optical working line having an unsatisfactory line condition than to a radio line corresponding to an optical standby line in a pair with an optical working line having a satisfactory line condition. As a result, it is possible to relieve a
20 radio line upon taking into consideration the line condition in a transmission line.

 It is _____
possible to give a higher priority to the relief of a radio line corresponding to an optical working line than
25 to a radio line corresponding to an optical standby line and, moreover, to lower the rank for relief of a radio line corresponding to a faulty optical line. As a result, it is possible to relieve a radio line upon

taking into consideration both the redundant configuration of the optical transmission line and the state of failure occurrence in the optical transmission line.

5 It is _____ possible to give a higher priority to the relief of a radio line corresponding to an optical working line than to a radio line corresponding to an optical standby line and, moreover, to give a higher priority to the relief
10 of a radio line corresponding to an optical standby line in a pair with an optical working line having an unsatisfactory line condition than to a radio line corresponding to an optical standby line in a pair with an optical working line having a satisfactory line
15 condition. As a result, it is possible to relieve a radio line upon taking into consideration both the redundant configuration of the optical transmission line and the state of failure occurrence in the optical transmission line.

20 Consequently, (1) a _____ higher priority is given to the relief of a radio line corresponding to an optical working line than to a radio line corresponding to an optical standby line; (2) the rank for relief of a radio line corresponding to a
25 faulty optical line is reduced; and (3) a higher priority is given to the relief of a radio line corresponding to an optical standby line in a pair with an optical working line having an unsatisfactory line

condition than to a radio line corresponding to an optical standby line in a pair with an optical working line having a satisfactory line condition. As a result, it is possible to relieve a radio line upon taking into
5 consideration the redundancy of the optical transmission line, the line condition in the transmission line and the state of failure occurrence in an optical transmission line.

As many apparently widely different embodiments of
10 the present invention can be made without departing from the spirit and scope thereof, it is to be understood that the invention is not limited to the specific embodiments thereof except as defined in the appended claims.

CLAIMS:

1. A method of relieving a radio line in a synchronous digital hierarchy (SDH) network in which a radio transmission line is introduced between optical
5 transmission lines each having a plurality of optical lines, comprising the steps of:
 providing radio working lines to correspond to respective optical lines and providing one radio standby line;
10 monitoring occurrence of failure in each optical line and occurrence of failure in the radio working lines;
 when occurrence of failure in an optical line has been detected, reducing the relief priority level of
15 the radio working line corresponding to this optical line below the relief priority of radio working lines corresponding to optical lines that have not failed; and
 when failure has occurred in two or more radio working lines, transmitting data, which is to be sent to
20 a radio working line having a higher relief priority level via the radio standby line and relieving the radio working lines in which the failure has occurred.
2. A method according to claim 1, wherein the optical lines consist of a plurality of pairs of an optical working line
25 and optical standby line, the radio lines having radio working lines corresponding to respective optical working lines, as well as one radio standby line.

3. A method according to claim 1, wherein the optical lines consist of a plurality of pairs of an optical working line and optical standby line, the radio lines having radio working lines corresponding to respective _____

5 optical working lines and respective _____ optical standby lines, as well as one radio standby line.

4. A method according to claim 1, 2 or 3, wherein the optical lines consist of N _____ pairs of an optical working line and optical standby line, the radio lines have
10 radio working lines corresponding respectively to
n ($< N$) _____ optical working lines and n _____
optical standby lines, as well as one radio standby
line, and data on (N-n) _____ optical working lines
and (N-n) _____ optical standby lines being optically
15 transmitted in parallel with the radio transmission
lines.

5. A method of relieving a radio line in a synchronous digital hierarchy (SDH) network in which a radio transmission line is introduced between optical
20 transmission lines each of which has N _____ pairs
of an optical working line and optical standby line,
comprising the steps of:

providing radio working lines corresponding to
respective ones of n ($\leq N$) _____ optical working
25 lines and n _____ optical standby lines, as well as
one radio standby line;

making a relief priority, for those radio working lines
corresponding to optical working lines, higher

than the priority for radio working lines corresponding to optical standby lines;

monitoring occurrence of failure in each radio working line; and

5 when a failure has occurred in two or more radio working lines, transmitting data, which is to be sent to a radio working line having a higher relief priority via the radio standby line and relieving the radio working lines in which the failure has occurred.

10 6. A method according to claim 5, wherein when the condition $n \leq N$ holds, data on $(N-n)$ ——— optical working lines and $(N-n)$ ——— optical standby lines is optically transmitted in parallel with the radio transmission lines.

15 7. A method of relieving a radio line in a synchronous digital hierarchy (SDH) network in which a radio transmission line is introduced between optical transmission lines each of which has a plurality of pairs of an optical working line and optical standby line,
20 comprising the steps of:

providing radio working lines corresponding to respective ——— optical working lines and optical standby lines, as well as one radio standby line;

25 monitoring the line condition in each optical working line and monitoring the occurrence of failure in the radio working lines;

making a relief priority level, for a radio working line which corresponds to an optical standby line in a pair with

an optical working line having an unsatisfactory line condition, higher than the relief priority level for radio working lines which correspond to optical standby lines in pairs with optical working lines having a satisfactory line condition;

when a failure has occurred in two or more radio working lines, transmitting data, which is to be sent to a radio working line having a higher relief priority level via the radio standby line and relieving the radio working lines in which the failure has occurred.

8. A method of relieving a radio line in a synchronous digital hierarchy (SDH) network in which a radio transmission line is introduced between optical transmission lines each of which has N ——— pairs of an optical working line and optical standby line, comprising the steps of:

providing radio working lines corresponding to respective ones of n ($\leq N$) ——— optical working lines and n ——— optical standby lines, as well as one radio standby line;

monitoring the occurrence of failure in each optical line and the occurrence of failure in the radio working lines;

making relief priorities, for radio working lines which correspond to optical working lines, higher than the relief priority levels of radio working lines corresponding to optical standby lines;

when occurrence of failure in an optical working

line has been detected, making a relief priority level, for the radio working line corresponding to this optical working line, lower than the relief priority level for radio working lines corresponding to optical lines that have not failed and, when occurrence of failure in an optical standby line has been detected, making a relief priority level for the radio working line corresponding to this optical standby line lower than the relief priority level for radio working lines corresponding to optical standby lines that have not failed; and

when a failure has occurred in two or more radio working lines, transmitting data, which is to be sent to a radio working line having a higher relief priority level, via the radio standby line and relieving the radio working lines in which the failure has occurred.

9. A method of relieving a radio line in a synchronous digital hierarchy (SDH) network in which a radio transmission line is introduced between optical transmission lines each of which has a plurality of pairs of an optical working line and an optical standby line, comprising the steps of:

providing radio working lines corresponding to respective ——— optical working lines and optical standby lines, as well as a radio standby line; monitoring the line condition in each optical working line and monitoring occurrence of failure in the radio working lines;

making relief priority levels, for radio working lines

corresponding to optical working lines, higher than the relief priority levels of radio working lines corresponding to optical standby lines, and making a relief priority level, for a radio working line corresponding to an optical standby line in a pair with an optical working line having an unsatisfactory line condition, higher than the relief priority levels of radio working lines corresponding to optical standby lines in pairs with optical working lines having a satisfactory line condition;

10 when a failure has occurred in two or more radio working lines, transmitting data, which is to be sent to a radio working line having a higher relief priority level, via the radio standby line and relieving the radio working lines in which the failure has occurred.

15 10. A method of relieving a radio line in a synchronous digital hierarchy (SDH) network in which a radio transmission line is introduced between optical transmission lines each of which has a plurality of pairs of an optical working line and an optical standby line, comprising the steps of:

20 providing radio working lines corresponding to respective ——— optical working lines and optical standby lines, as well as one radio standby line;

25 monitoring line condition and occurrence of failure in each optical line and monitoring occurrence of failure in the radio working lines;

 ranking relief priority levels for the radio lines in accordance with (1), (2), (3), below:

(1) making relief priority levels, for radio working lines corresponding to optical working lines, higher than the relief priority levels for radio working lines corresponding to optical standby lines;

5 (2) when occurrence of failure in an optical working line has been detected, making a relief priority level, for the radio working line corresponding to this optical working line, lower than the relief priority level of radio working lines corresponding to optical lines that have not
10 failed and, when occurrence of failure in an optical standby line has been detected, making a relief priority level for the radio working line corresponding to this optical standby line, lower than the relief priority level of radio working lines corresponding to optical standby lines that have
15 not failed;

(3) making a relief priority level, for a radio working line corresponding to an optical standby line in a pair with an optical working line having an unsatisfactory line condition, higher than the relief priority level of radio working
20 lines corresponding to optical standby lines in pairs with optical working lines having a satisfactory line condition; and

when a failure has occurred in two or more radio working lines, transmitting data, which is to be sent to
25 a radio working line having a higher relief priority level, via the radio standby line and relieving the radio working lines in which the failure has occurred.

11. Radio equipment in an SDH network in which a

radio transmission line is introduced between optical transmission lines each of which has a plurality of optical lines, said radio transmission line having radio working lines corresponding to respective ———

5 prescribed optical lines, as well as one radio standby line, said radio equipment comprising:

first detecting means for detecting an occurrence of failure in each optical line;

second detecting means for detecting an occurrence of
10 failure in each radio working line;

relief-priority management means which, when occurrence of failure in an optical line has been detected, is adapted to reduce a relief priority/^{level}for the radio working line ——— corresponding to this optical line, below the relief priority
15 level of radio working lines ——— corresponding to optical lines that have not failed; and

line changeover control means which, when failure has occurred in two or more radio working lines, is adapted to transmit data, which is to be sent to a radio
20 working line having a higher relief priority level, via the radio standby line.

12. Radio equipment in an SDH network in which a radio transmission line is introduced between optical transmission lines each of which has N ——— pairs
25 of an optical working line and an optical standby line, said radio transmission line having radio working lines corresponding to respective ones of n ($\leq N$) ——— optical working lines and n ——— optical standby

lines, as well as one radio standby line, said radio equipment comprising:

relief-priority management means for making relief priority levels, for radio working lines corresponding to optical

5 working lines, higher than those of radio _____
working lines corresponding to optical standby lines;

detecting means for detecting occurrence of failure in each radio working line; and

line changeover control means which, when failure
10 has occurred in two or more radio working lines, is adapted to transmit data, which is to be sent to a radio working line having a higher priority level, via the radio standby line.

13. Radio equipment in an SDH network in which a
15 radio transmission line is introduced between optical transmission lines each of which has a plurality of pairs of an optical working line and optical standby line, said radio transmission line having radio working lines corresponding to respective ones of optical working
20 lines and optical standby lines, as well as one radio standby line, said radio equipment comprising:

first detecting means for detecting a line condition in each optical working line;

second detecting means for detecting any occurrence of
25 failure in each radio working line;

relief-priority management means for making a relief priority level, of a radio working line corresponding to an optical standby line in a pair with an optical working

line having an unsatisfactory line condition, higher than the relief levels of radio working lines corresponding to optical standby lines in pairs with optical working lines having a satisfactory line condition; and

5 line changeover control means which, when failure has occurred in two or more radio working lines, is adapted to transmit data which is to be sent to a radio working line having a higher relief level, via the radio standby line.

10 14. Radio equipment in an SDH network in which a radio transmission line is introduced between optical transmission lines each of which has N ——— pairs of an optical working line and optical standby line, said radio transmission line having radio working lines
15 corresponding to respective ones of n ($\leq N$) ——— optical working lines and n ——— optical standby lines, as well as one radio standby line, said radio equipment comprising:

 first detecting means for detecting any occurrence of
20 failure in each optical line;

 second detecting means for detecting any occurrence of failure in each radio working line;

 relief-priority management means for making relief priority levels, for relief of radio working lines corresponding to optical
25 working lines, higher than the priority levels of radio working lines corresponding to optical standby lines; when occurrence of failure in an optical working line has been detected, for making a relief priority level, for the

radio working line corresponding to this optical working line, lower than the relief priority levels of radio working lines corresponding to optical lines that have not failed; and when occurrence of failure in an optical standby line
5 has been detected, for making a relief priority level, for the radio working line corresponding to this optical standby line, lower than the relief priority levels of radio working lines corresponding to optical standby lines that have not failed; and

10 line changeover control means which, when failure has occurred in two or more radio working lines, is adapted to transmit data, which is to be sent to a radio working line having a higher relief priority level, via the radio standby line.

15 15. Radio equipment in an SDH network in which a radio transmission line is introduced between optical transmission lines, each of which has a plurality of pairs of an optical working line and optical standby line, said radio transmission line having radio working lines
20 corresponding to respective ones of optical working lines and optical standby lines, as well as one radio standby line, said radio equipment comprising:

first detecting means for detecting the line condition in each optical working line;

25 second detecting means for detecting any occurrence of failure in each radio working line;

relief priority management means for making relief priority levels, of radio working lines corresponding to optical

working lines, higher than the priority levels, of radio working lines corresponding to optical standby lines, and making a relief priority level, for a radio working line corresponding to an optical standby line in a pair with an optical working line having an unsatisfactory line condition, higher than the relief priority level of radio working lines corresponding to optical standby lines in pairs with optical working lines having a satisfactory line condition; and

10 line changeover control means which, when failure has occurred in two or more radio working lines, is adapted to transmit data, which is to be sent to a radio working line having a higher relief priority level, via the radio standby line.

15 16. Radio equipment in an SDH network in which a radio transmission line is introduced between optical transmission lines each of which has a plurality of pairs of an optical working line and an optical standby line, said radio transmission line having radio working lines
20 corresponding to respective ——— optical working lines and optical standby lines, as well as one radio standby line, said radio equipment comprising:

first detecting means for detecting the line condition in each optical working line;

25 second detecting means for detecting any occurrence of failure in each radio working line;

relief-priority management means for (1) making relief priority levels, of radio working lines corresponding to ———

optical working lines higher than the priority levels of radio working lines corresponding to optical standby lines; (2) when occurrence of failure in an optical working line has been detected, for making a relief priority level, for the radio working line corresponding to this optical working line, lower than the relief priority level of radio working lines corresponding to optical lines that have not failed and, when occurrence of failure in an optical standby line has been detected, for making a relief priority level, for the radio working line corresponding to this optical standby line, lower than the priority levels of radio working lines corresponding to optical standby lines that have not failed; and (3) for making a relief priority level, for a radio working line corresponding to an optical standby line in a pair with an optical working line having an unsatisfactory line condition, higher than the priority levels of radio working lines corresponding to optical standby lines in pairs with optical working lines having a satisfactory line condition; and line changeover control means which, when failure has occurred in two or more radio working lines, is adapted to transmit data, which is to be sent to a radio working line having a relief priority level, via the radio standby line.

17. A method of relieving a radio line substantially according to any one of the embodiments hereinbefore described with reference to the accompanying drawings.

18. Radio equipment in an SDH network substantially according to any one of the embodiments hereinbefore described with reference to the accompanying drawings.



Application No: GB 9519312.4
Claims searched: 1-18

Examiner: Keith Williams
Date of search: 27 December 1995

Patents Act 1977
Search Report under Section 17

Databases searched:

UK Patent Office collections, including GB, EP, WO & US patent specifications, in:
UK CI (Ed.N): H4B (BK8,BKR,BKX); H4M (MP,MR); H4P (PEE,PPD)
Int CI (Ed.6): H04B 1/74, 10/08; H04J 3/08, 3/14; H04L 1/22, 12/437
Other: online WPI, JAPIO

Documents considered to be relevant:

Category	Identity of document and relevant passage	Relevant to claims
A	EP 0225643 A2 NEC Corp. - see abstract (equivalent to US 4908839)	

X Document indicating lack of novelty or inventive step
Y Document indicating lack of inventive step if combined with one or more other documents of same category.
& Member of the same patent family

A Document indicating technological background and/or state of the art.
P Document published on or after the declared priority date but before the filing date of this invention.
E Patent document published on or after, but with priority date earlier than, the filing date of this application.